


PLL 28.675.30.1/DALI

PL 28 (1xLED 97W 830/3000K 11240lm)

— C0/C180 cd / 1000 lm - - - C90/C270

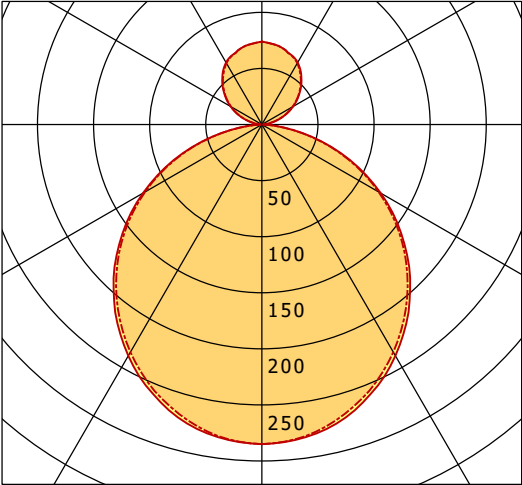

	C0	C90	C180	C270
0°	285	285	285	285
30°	238	234	238	234
60°	122	120	122	120
90°	1	1	1	1
120°	32	32	32	32
150°	64	63	64	63
180°	74	74	74	74
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 79% / ↑ 21%
System Power	97 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.1
UGR C90/C270	22.0
CIE Flux Codes	48 79 96 79 100
Ra/CRI	>80