



SCOUT 202.930.35.2/DALI-ST

Scout Next (1xLED 21W 930/3000K 2310lm 35°)

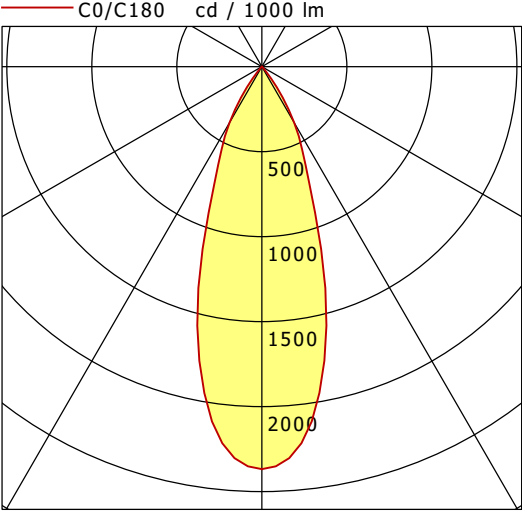

	C0	C90	C180	C270
0°	2368	2368	2368	2368
15°	1465	1465	1465	1465
30°	380	380	380	380
45°	11	11	11	11
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

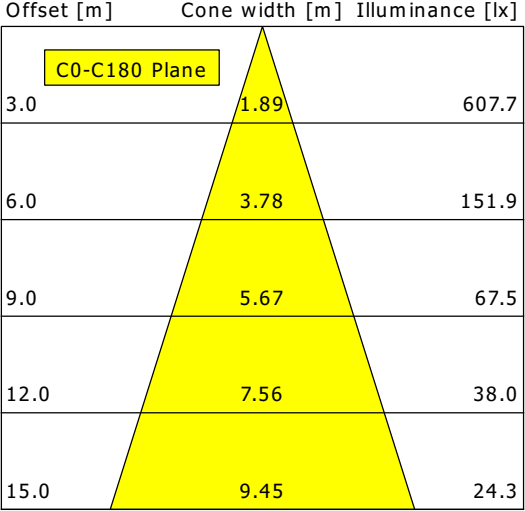

η		LED
Efficiency		110 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		21 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.1
UGR C90/C270		17.1
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90