


PLL 28.475.40.1/DALI

PL 28 (1xLED 49W 840/4000K 5500lm)

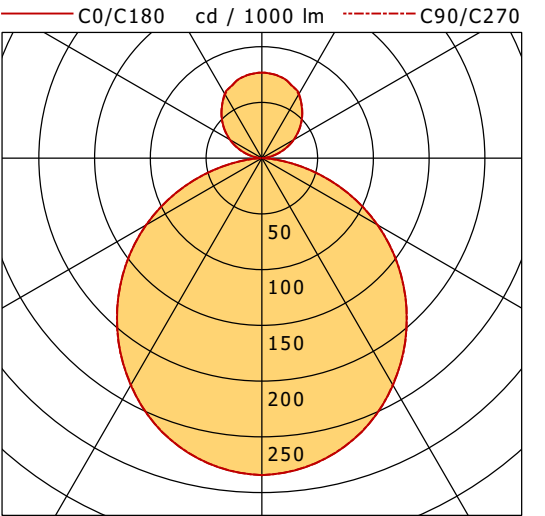

	C0	C90	C180	C270
0°	284	284	284	284
30°	235	235	235	235
60°	120	120	120	120
90°	1	1	1	1
120°	33	33	33	33
150°	67	66	67	66
180°	77	77	77	77
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	112 lm/W
Direct/Indirect	↓ 78% / ↑ 22%
System Power	49 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.9
UGR C90/C270	21.9
CIE Flux Codes	48 79 96 78 100
Ra/CRI	> 80