


PLL 28.675.30.2/DALI

PL 28 (1xLED 97W 830/3000K 8840lm)

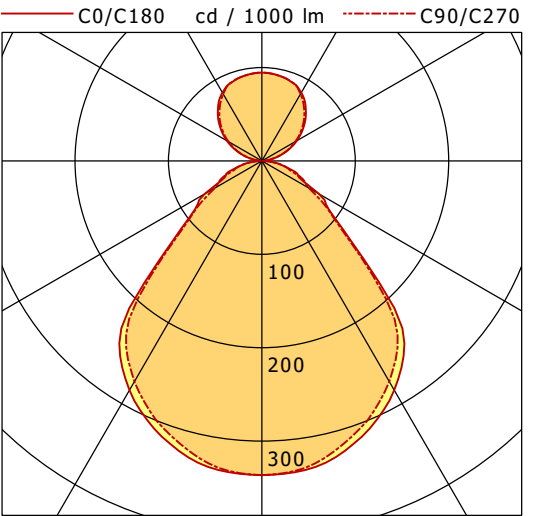

	C0	C90	C180	C270
0°	336	336	336	336
30°	283	273	283	273
60°	71	58	71	58
90°	1	1	1	1
120°	43	41	43	41
150°	84	83	84	83
180°	95	95	95	95
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	91 lm/W
Direct/Indirect	↓ 73% / ↑ 27%
System Power	97 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.8
UGR C90/C270	17.6
CIE Flux Codes	60 87 97 73 100
Ra/CRI	> 80