


PLL 57.925.30.1/DALI


PL 57 (1xLED 112W 830/3000K 10620lm)

— C0/C180 cd / 1000 lm - - - C90/C270

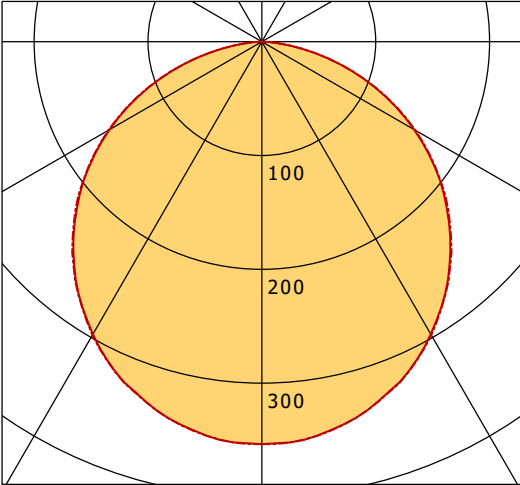

	C0	C90	C180	C270
0°	354	354	354	354
15°	339	339	339	339
30°	297	298	297	298
45°	233	234	233	234
60°	154	156	154	156
75°	65	65	65	65
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

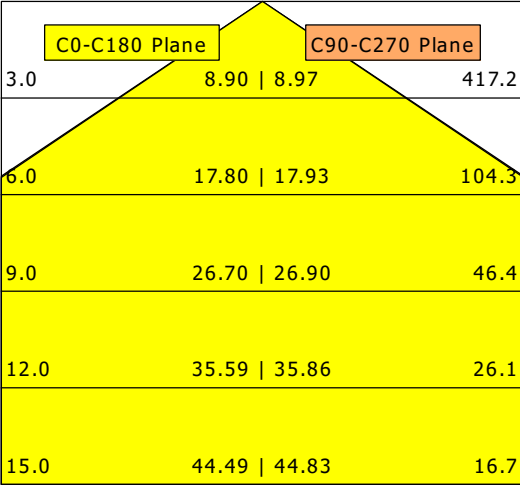

η	LED
Efficiency	95 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	112 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.4
UGR C90/C270	21.5
CIE Flux Codes	47 79 96 100 100
Ra/CRI	> 80