


LUZ-T23 105.840.BW

LUZ | Track-Mounted (1xLED 32W 840/4000K 5130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

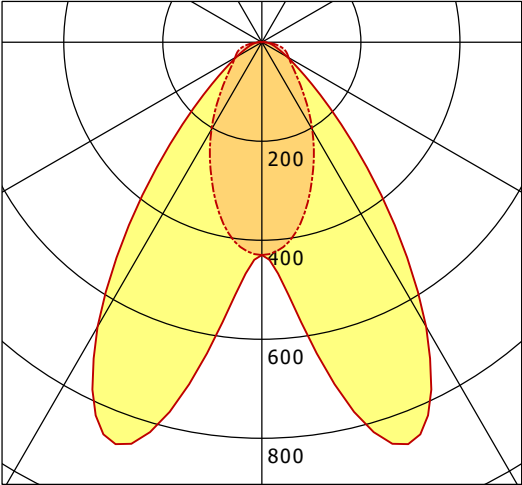

	C0	C90	C180	C270
0°	430	430	430	430
15°	796	346	796	346
30°	664	204	664	204
45°	210	102	210	102
60°	59	63	59	63
75°	24	42	24	42
90°	6	2	6	2
cd / 1000 lm				

LDC unsuitable for cone representation.
The C90 angle is oversized.

η Efficiency Direct/Indirect System Power	LED 160 lm/W ↓ 99% / ↑ 1% 32 W
UGR Reflection factors UGR C0/C180 UGR C90/C270	X=4H, Y=8H 70/50/20 20.4 22.1
CIE Flux Codes Ra/CRI	72 91 97 99 100 > 80