

**D**

- **Beachten Sie folgende Montageanweisungen und Hinweise:**  
 970337 Hinweisblatt für Leuchtstoffröhren  
 818278 Allgemeines Hinweisblatt für LED-Leuchten  
 827473 Montageanweisung für AOV Abschirmfolie  
 Beigelegte Montageanweisungen für Verbinder, Beton- und Trimless-Einbau beachten. Einbaumontage siehe Detail ① (Rückseite).
- **IP40 gilt nur in Verbindung mit montiertem Acrylglasprofil.** Die thermische Längenausdehnung des Aluminiumprofils beträgt bei  $dT = 10$  Kelvin 0.3 mm pro Meter.
- **Einbaulänge:** Profilänge + 2 x 3 mm (Enddeckelstärke)  
**Ausschnitt:** (Einbaulänge + 2 mm) x 74 mm  
**Einbautiefe:** 100 mm  
**Deckenstärke:** 6 - 25 mm  
**Spannbügelweite:** max. 220 mm

**GB**
**Consider the following installation instructions and notes:**

970337 notes for fluorescent tubes

818278 general notes for LED luminaires

827473 installation instruction for AOV shielding foil

Consider the enclosed installation instructions for connectors, concrete and trimless mounting. Recessed mounting see detail ① (on the back).

**IP40 only applies in with mounted acrylic glass profile.** The linear thermal expansion of the aluminium profile is about 0.3 mm per meter at  $dT = 10$  Kelvin.

**Recessed length:** profile length + 2 x 3 mm (thickness of end covers)

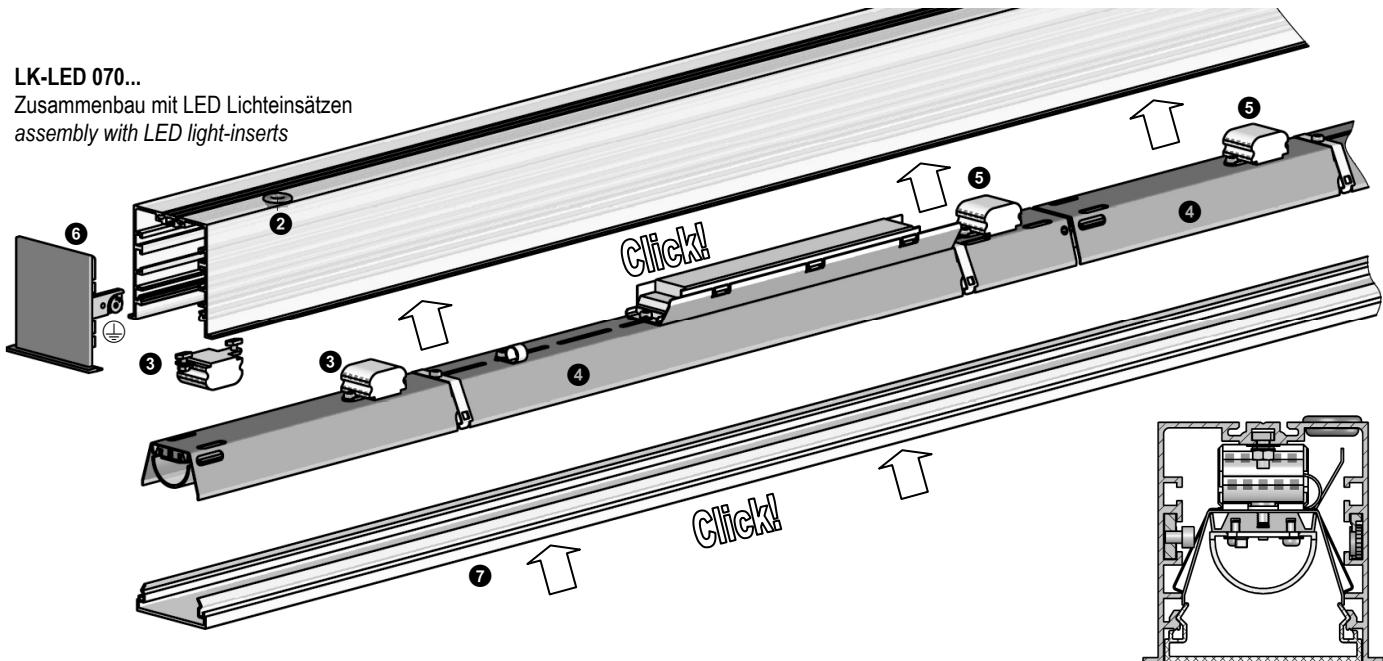
**Cut-out:** (recessed length + 2 mm) x 74 mm

**Installation depth:** 100 mm

**Ceiling thickness:** 6 - 25 mm

**Required clamps space:** max. 220 mm

**LK-LED 070...**

 Zusammenbau mit LED Lichteinsätzen  
 assembly with LED light-inserts

**LK-T16 070...**

 Zusammenbau mit T16 Lichteinsätzen  
 assembly with T16 light-inserts
