


ML-E 060.10840.3 OPD/DALI


Monoline 060 | Recessed (1xLED 21W 840/4000K 3330lm)

— C0/C180 cd / 1000 lm - - - C90/C270

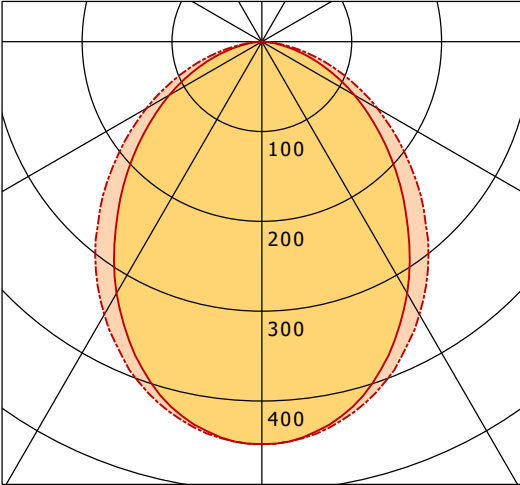

	C0	C90	C180	C270
0°	448	448	448	448
15°	414	422	414	422
30°	323	351	323	351
45°	214	253	214	253
60°	119	148	119	148
75°	42	58	42	58
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

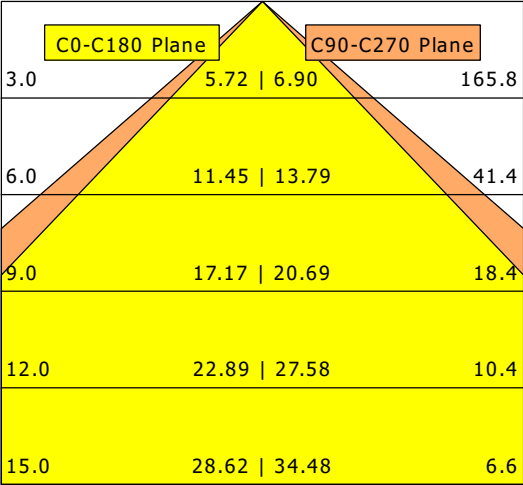

η		LED
Efficiency		159 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		21 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.7
UGR C90/C270		24.9
CIE Flux Codes		54 84 97 100 100
Ra/CRI		> 80