



ORYO-R 101.940.45/DALI

Oryo 100 | Recessed (1xLED 20W 940/4000K 1940lm 45 °)

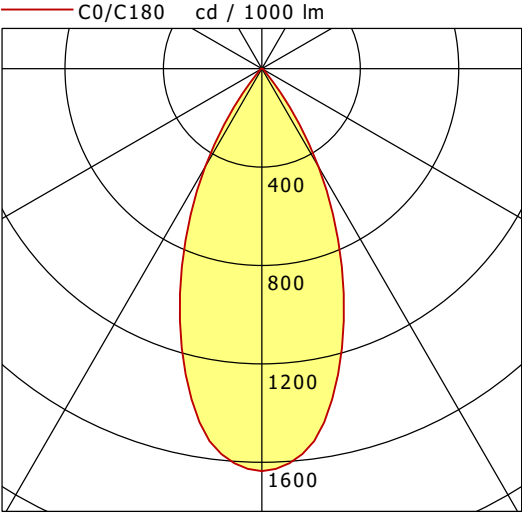

	C0	C90	C180	C270
0°	1636	1636	1636	1636
15°	1232	1232	1232	1232
30°	461	461	461	461
45°	24	24	24	24
60°	8	8	8	8
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

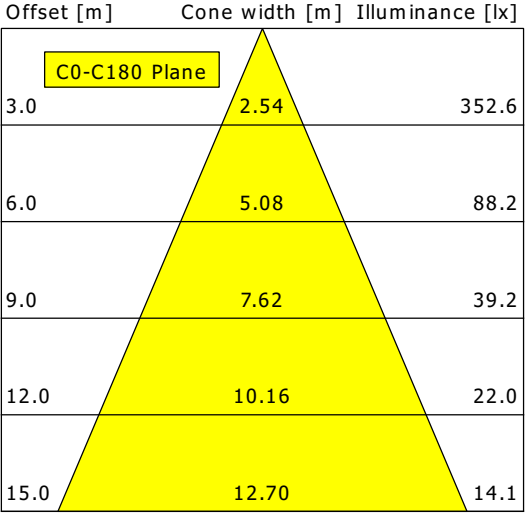

η		LED
Efficiency		97 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		20 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.7
UGR C90/C270		21.7
CIE Flux Codes	96 99 100 100 100	
Ra/CRI		>90