





LED recessed spot set, on/off  
Artikel-Nr. 38144633

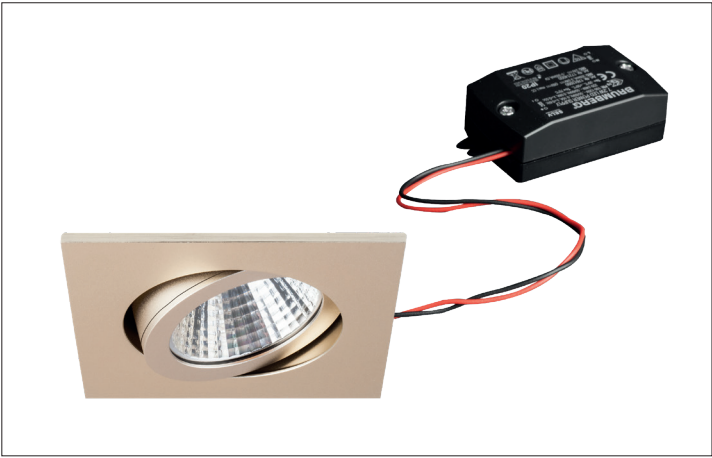

LED recessed spot set, on/off, champagne, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Pivoted, With control gear: Yes, Control: on/off.

|             |                  |
|-------------|------------------|
| Artikel-Nr. | 38144633         |
| Stand:      | 26.10.2021 02:15 |

|                                    |                             |
|------------------------------------|-----------------------------|
| Colour temperature                 | 3000 K                      |
| Colour                             | Champagne                   |
| Length                             | 82 mm                       |
| Beam angle                         | 38 °                        |
| Amount of light sources / fittings | 1 Qty                       |
| Material                           | Aluminium / Glass / Plastic |
| Power                              | 6 W                         |
| Lamp                               | LED                         |
| Colour rendering                   | CRI > 80                    |
| Control                            | on/off                      |
| Outer diameter                     | 82 mm                       |

|                      |                     |
|----------------------|---------------------|
| Built-in diameter    | 68 mm               |
| Installation depth   | 50 mm               |
| Voltage              | 230V AC 50Hz        |
| Degree of protection | IP20                |
| Protection class     | II                  |
| Circlip              | Without circlip     |
| Adjustability        | Pivoted             |
| Length               | 82 mm               |
| Width                | 82 mm               |
| Swivel angle         | 20 °                |
| Circuit type         | Parallel conduction |