


PLL 28.675.40.2/DALI

PL 28 (1xLED 97W 840/4000K 9300lm)

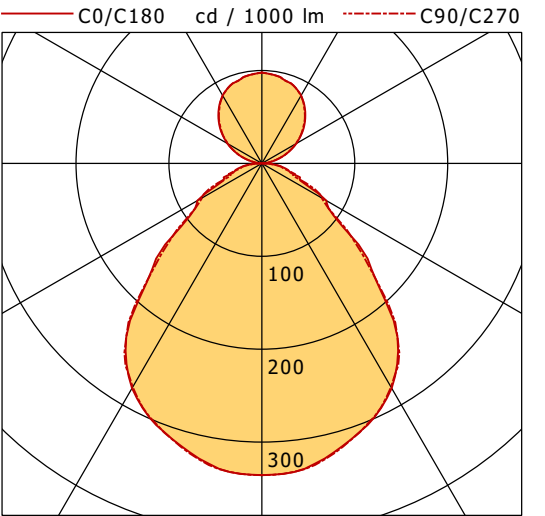

	C0	C90	C180	C270
0°	336	336	336	336
30°	279	278	279	278
60°	80	74	80	74
90°	0	0	0	0
120°	43	42	43	42
150°	84	84	84	84
180°	98	98	98	98
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	96 lm/W
Direct/Indirect	↓ 72% / ↑ 28%
System Power	97 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.2
UGR C90/C270	18.1
CIE Flux Codes	60 87 97 72 100
Ra/CRI	> 80