



VTFL-A 102.827/DALI

Vale-Tu Flat Large | Surface-Mounted (1xLED 31W 827/2700K 2780lm)

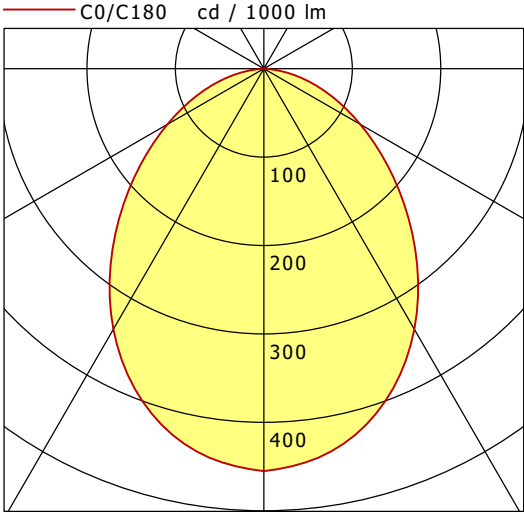

	C0	C90	C180	C270
0°	455	455	455	455
15°	423	423	423	423
30°	340	340	340	340
45°	228	228	228	228
60°	126	126	126	126
75°	49	49	49	49
90°	0	0	0	0
cd / 1000 lm				

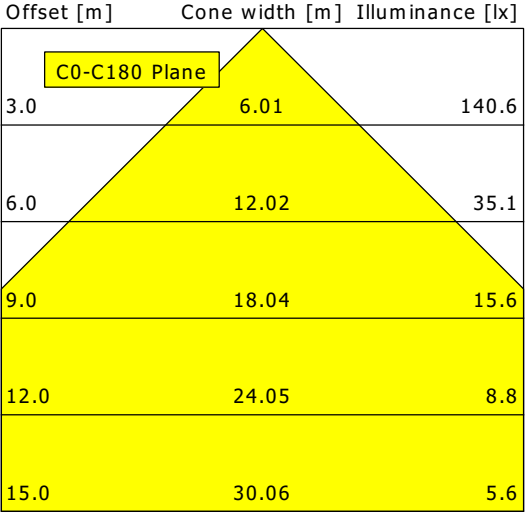

η		LED
Efficiency		90 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		31 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		27.1
UGR C90/C270		27.1
CIE Flux Codes		55 84 97 100 100
Ra/CRI		>80