



CSA-R 403.930.WF/DALI

CSA 40 (1xLED 27W 930/3000K 3370lm 57°)

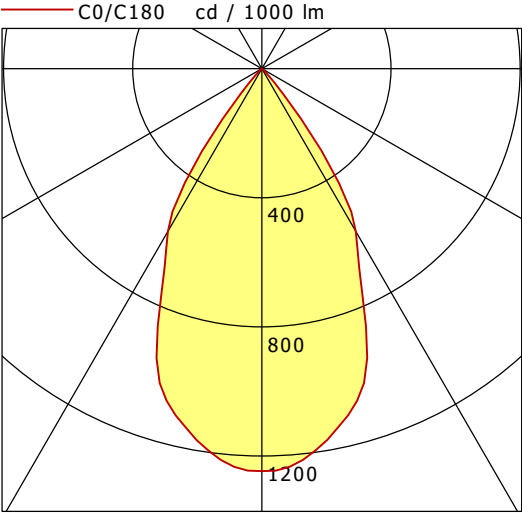

	C0	C90	C180	C270
0°	1247	1247	1247	1247
15°	1089	1089	1089	1089
30°	582	582	582	582
45°	19	19	19	19
60°	0	0	0	0
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

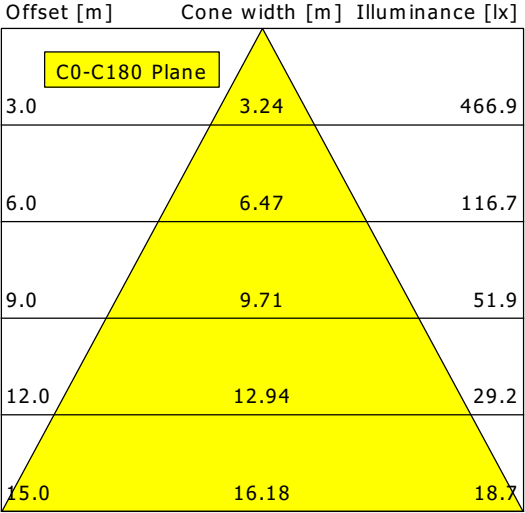

η		LED
Efficiency		125 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.9
UGR C90/C270		22.9
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		>90