


SCELP 501.2027.15/DALI

Scene 5 (1xLED 27W 827/2700K 2490lm 15 °)

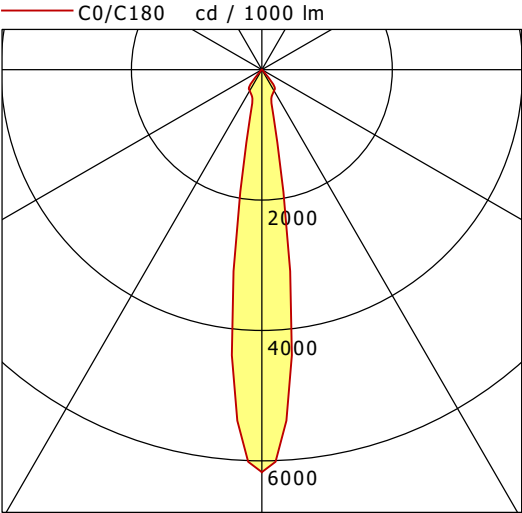

	C0	C90	C180	C270
0°	6173	6173	6173	6173
15°	618	618	618	618
30°	373	373	373	373
45°	23	23	23	23
60°	2	2	2	2
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.85	1707.9
6.0	1.70	427.0
9.0	2.55	189.8
12.0	3.40	106.7
15.0	4.25	68.3

η		LED
Efficiency		92 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.4
UGR C90/C270		17.4
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		> 80