



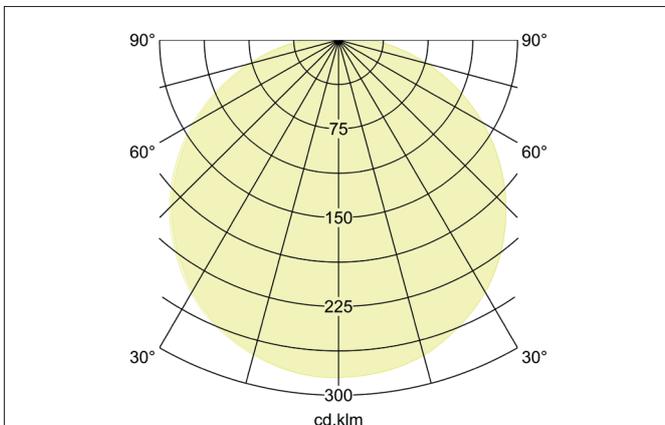

**PANAY MAXI LED surface-mounted ceiling downlight, 3CCT, trailing edge dimmable**  
Article no. 12575073

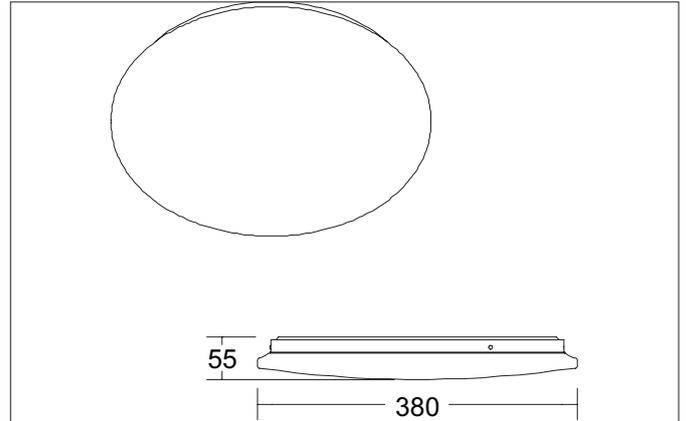

**Tender**  
LED surface-mounted ceiling downlight, 3CCT, trailing edge dimmable, Round. Luminaire diameter 380.0 mm, Height 55.0 mm Weight 0.435 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal Luminous flux 2.170 - 2.470 lm, Power 1 x 25 W, Light colour warm white to daylight white, Correlated color temprature (CCT) 3.000 - 6.500 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Steel / Plastic, Colour: white glossy, Permissible ambient temperature (ta): -20 °C up to +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK05 .With electronic driver, Trailing-edge phase dimmable.

**Product Benefits**

- Attractively priced surface-mounted ceiling or wall light in a round design.
- 3CCT: three different color temperatures can be set: 3,000 K, 4,000 K or 6,000 K.
- Three different sizes available.
- Also available in „with microwave sensor” version.
- Phase section dimmable.


**PANAY MAXI LED surface-mounted ceiling downlight, 3CCT, trailing edge dimmable**

Article no. 12575073

Article data	
Article no.	12575073
GTIN	4255752500643
Series name	PANAY MAXI
Short description	LED surface-mounted ceiling downlight, 3CCT, trailing edge dimmable
Material	Steel / Plastic
Colour	white glossy
Type of surface	Glossy
Shape	Round
Outer diameter	380 mm
Height	55 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, phase cut-off dimmable
Weight	0.435 kg
D licence plate	No
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 6.500 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	6,500 K
Light output	Direct
Luminous flux	2,170 - 2,470 lm
Luminous flux 1	2,170 lm
Luminous flux 2	2,470 lm
Luminous flux 3	2,340 lm
System efficiency	99 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	25 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	not required

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK05
Material cover	Plastic, opal
Suitable for through-wiring	Yes

**PANAY MAXI LED surface-mounted ceiling downlight, 3CCT, trailing edge dimmable**  
Article no. 12575073

Packing data	
Gross weight	0.485 kg
Length of packaging	390 mm
Packaging width	390 mm
Packaging height	65 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>