



TIBI-A 400.1840/DALI

Tibi Surface-Mounted (1xLED 16W 840/4000K 1810lm)

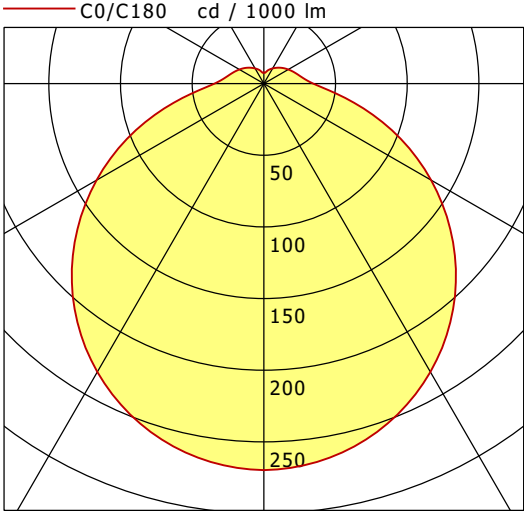

	C0	C90	C180	C270
0°	270	270	270	270
30°	232	232	232	232
60°	135	135	135	135
90°	34	34	34	34
120°	20	20	20	20
150°	12	12	12	12
180°	8	8	8	8
cd / 1000 lm				

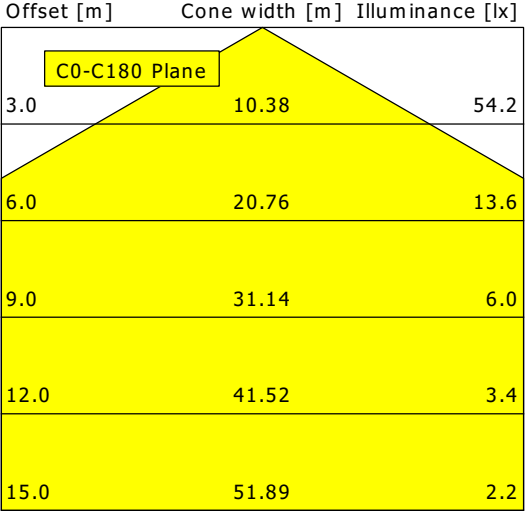

η		LED
Efficiency		113 lm/W
Direct/Indirect		↓ 87% / ↑ 13%
System Power		16 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		21.8
UGR C90/C270		21.8
CIE Flux Codes		42 72 91 87 100
Ra/CRI		>80