
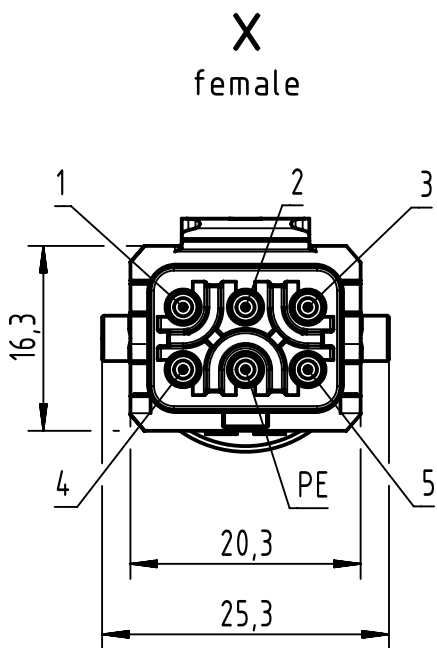


Connector Location A


Connector Location B

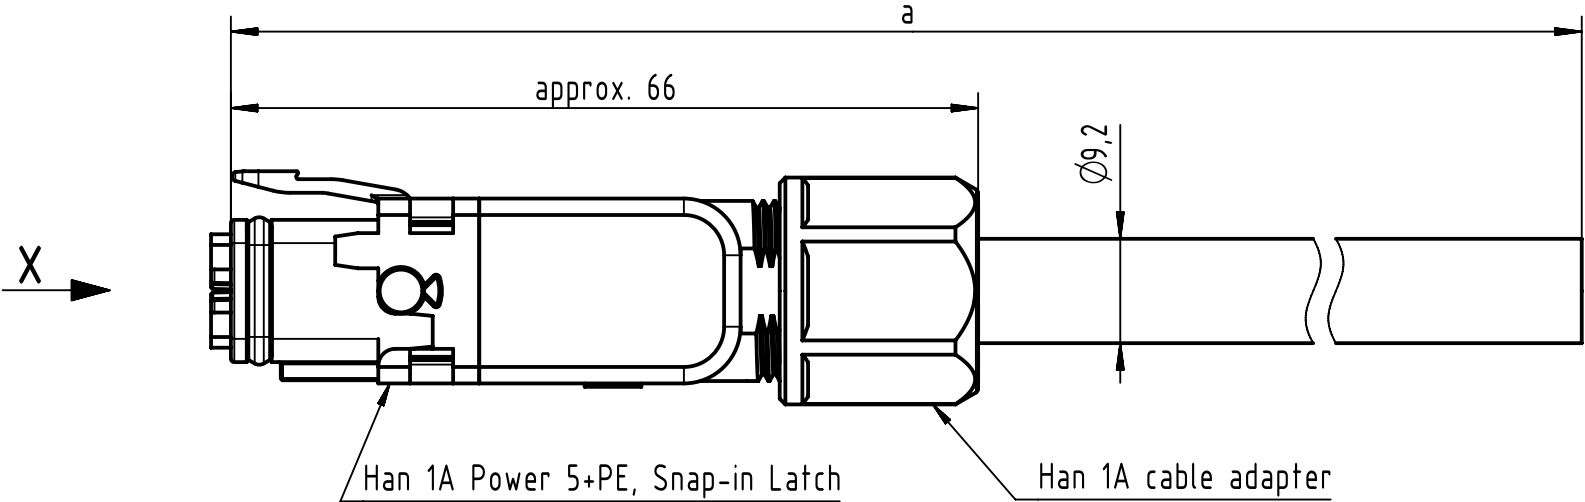

Loading Plan

1	wire 1
2	wire 2
3	wire 3
4	wire 4
5	wire 5
PE	green/yellow

NOTE:
* Silver plated contacts
- Protection level: IP65
- Temperature range: -30°C ... +80°C

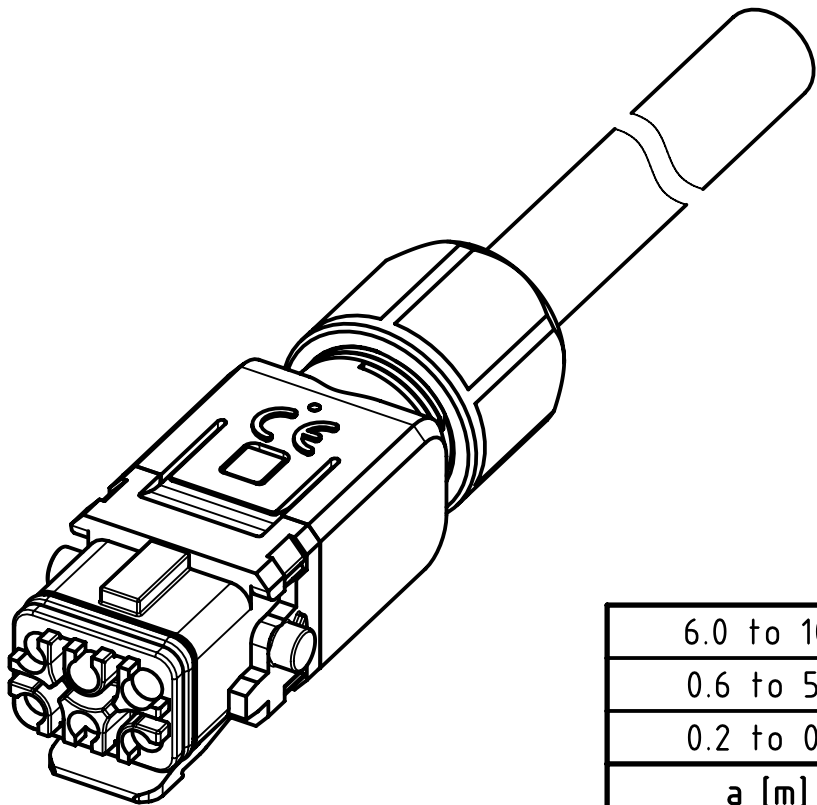

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

JZ-500 6G1.5mm², PVC, grey	33501100203XXX
Type of cable	Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by 402676 Gross	Inspected by COSTEA Costea	Standardisation MUNTEANV Muntean	Date 2020-12-16	State Final Release	
	Department HCS - RO	Title Han1A CA 5+PE +latch f/- PVC				Doc-Key / ECM-Nr. 100838823/UGD/000/C 500000186260	
	HARTING Customised Solutions D-32339 Espelkamp	Type TB	Number 33501100203XXX			Rev. C	Page 1/1