


PLL 28.385.30.2/DALI

PL 28 (1xLED 36W 830/3000K 3060lm)

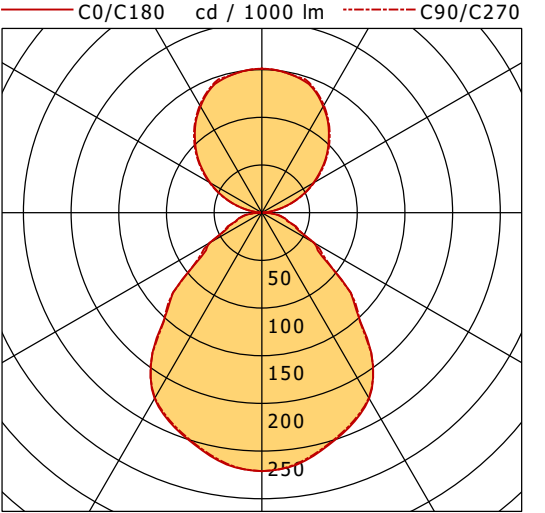

	C0	C90	C180	C270
0°	271	271	271	271
30°	225	224	225	224
60°	64	62	64	62
90°	1	1	1	1
120°	62	64	62	64
150°	129	130	129	130
180°	151	151	151	151
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	85 lm/W
Direct/Indirect	↓ 58% / ↑ 42%
System Power	36 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.5
UGR C90/C270	16.6
CIE Flux Codes	60 86 97 58 100
Ra/CRI	> 80