


# LK-L 070.11830.2245.1/DALI/NO


Lichtkanal 070 | Light-Insert (APB, 1xLED 51W 830/3000K 8200lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

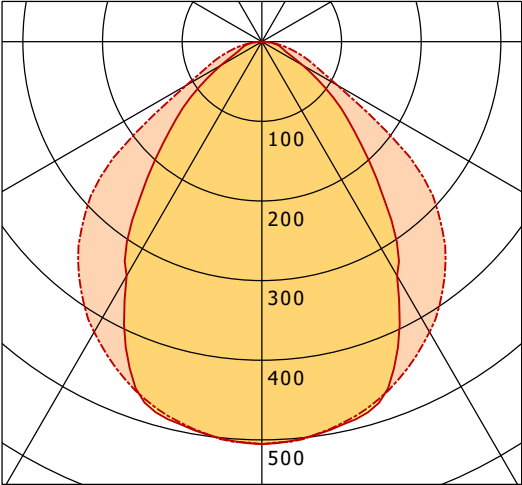

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 505 | 505 | 505  | 505  |
| 15°          | 487 | 482 | 487  | 482  |
| 30°          | 340 | 421 | 340  | 421  |
| 45°          | 170 | 316 | 170  | 316  |
| 60°          | 59  | 109 | 59   | 109  |
| 75°          | 24  | 38  | 24   | 38   |
| 90°          | 1   | 0   | 1    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

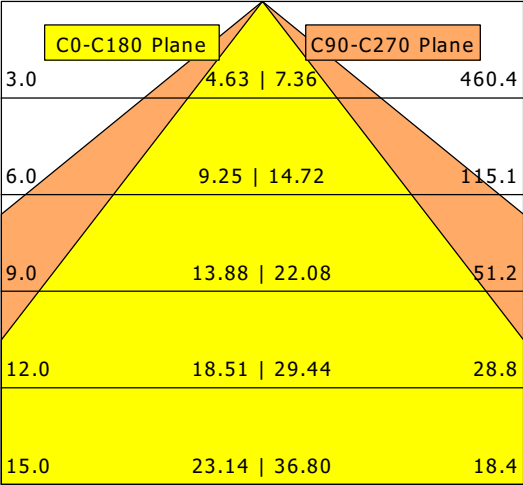

|                    |  |                  |
|--------------------|--|------------------|
| <b>η</b>           |  | LED              |
| Efficiency         |  | 161 lm/W         |
| Direct/Indirect    |  | ↓ 100% / ↑ 0%    |
| System Power       |  | 51 W             |
| <b>UGR</b>         |  | X=4H, Y=8H       |
| Reflection factors |  | 70/50/20         |
| UGR C0/C180        |  | 21.6             |
| UGR C90/C270       |  | 24.0             |
| CIE Flux Codes     |  | 63 89 98 100 100 |
| Ra/CRI             |  | > 80             |