


ORYO-R 101.927.15/DALI

Oryo 100 | Recessed (1xLED 18W 927/2700K 1320lm 15 °)

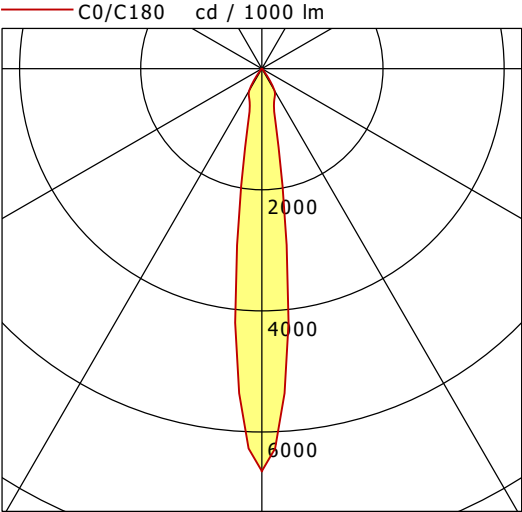

	C0	C90	C180	C270
0°	6647	6647	6647	6647
15°	829	829	829	829
30°	416	416	416	416
45°	15	15	15	15
60°	12	12	12	12
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.77	974.8
6.0	1.55	243.7
9.0	2.32	108.3
12.0	3.09	60.9
15.0	3.86	39.0

η		LED
Efficiency		74 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		18 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.1
UGR C90/C270		19.1
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		>90