

## Phase inverter, as wall panel mounting appliance inlet - without closure cap




| Product description       |                                                    |
|---------------------------|----------------------------------------------------|
| BALS-Prd.-Nr              | 2607                                               |
| EAN                       | 4024941026079                                      |
| Product category          | Phase inverter as surface mounting appliance inlet |
| Current                   | 16A                                                |
| Number of poles           | 5p                                                 |
| Poles                     | 3p+N+PE                                            |
| Position of earth contact | 6 h                                                |
| Voltage                   | 200/346 up to 240/415V                             |

| Product description            |                                                                                |
|--------------------------------|--------------------------------------------------------------------------------|
| Frequency                      | 50 and 60Hz                                                                    |
| Protection degree              | IP67                                                                           |
| Colour code                    | red RAL 3000                                                                   |
| Colour of appliance            | Collar red RAL 3000, Bayonet ring grey RAL 7035, Enclosure grey RAL 7035       |
| Connection design              | with screw terminal                                                            |
| Maximum conductor size         | 2,5 qmm                                                                        |
| Cable entry                    | other                                                                          |
| Height                         | 129mm                                                                          |
| Width                          | 88mm                                                                           |
| Depth                          | 89mm                                                                           |
| Flange size vertical           | 84mm                                                                           |
| Flange size horizontal         | 84mm                                                                           |
| Drill hole distance vertical   | 64mm                                                                           |
| Drill hole distance horizontal | 64mm                                                                           |
| Material of enclosure          | Polyamide                                                                      |
| Contact                        | The contact carrier is made of polyamide, the contacts are brass nickel plated |

| Logistics data |                  |
|----------------|------------------|
| Weight/pcs     | 0.203 kg / Piece |
| Packaging      | Bag              |
| Content amount | 1 ST             |

| Logistics data |               |
|----------------|---------------|
| EAN            | 4024941026079 |
| Length         | 89 mm         |
| Width          | 88 mm         |
| Height         | 129 mm        |
| Weight         | 0.204 kg      |
| Volume         | 1,010.328 ccm |
| Packaging      | Carton        |
| Content amount | 10 ST         |
| EAN            | 4024941941082 |
| Length         | 295 mm        |
| Width          | 185 mm        |
| Height         | 215 mm        |
| Weight         | 2.194 kg      |
| Volume         | 9,975 ccm     |

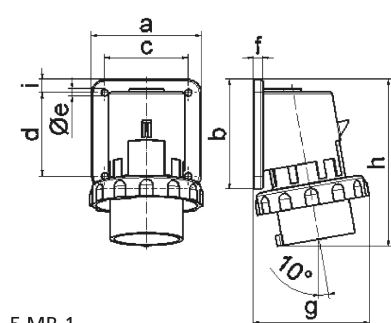

5 MB 1

| Ampere<br>Polzahl | 16<br>3 | 16<br>4 | 16<br>5 | 32<br>3 | 32<br>4 | 32<br>5 |
|-------------------|---------|---------|---------|---------|---------|---------|
| a                 | 74,0    | 75,0    | 84,0    | 90,0    | 90,0    | 90,0    |
| b                 | 84,0    | 100,0   | 84,0    | 75,0    | 75,0    | 75,0    |
| c                 | 58,0    | 62,0    | 64,0    | 78,0    | 78,0    | 78,0    |
| d                 | 64,0    | 74,0    | 64,0    | 45,0    | 45,0    | 45,0    |
| e ø               | 5,5     | 4,3     | 5,5     | 5,5     | 5,5     | 5,5     |
| f                 | 12,0    | 12,0    | 7,0     | 7,0     | 7,0     | 7,0     |
| g                 | 80,0    | 88,0    | 90,0    | 100,0   | 100,0   | 101,0   |
| h                 | 128,0   | 145,0   | 129,0   | 138,0   | 138,0   | 139,0   |
| i                 | -       | -       | 10,0    | 13,0    | 13,0    | 13,0    |
| Leiter mm² min    | 1       | 1       | 1       | 2,5     | 2,5     | 2,5     |
| Leiter mm² max    | 2,5     | 2,5     | 2,5     | 6       | 6       | 6       |