


ML-A 060.11830.3 AOV/DALI


Monoline 060 | Surface-Mounted (1xLED 32W 830/3000K 4730lm)

— C0/C180 cd / 1000 lm - - - C90/C270

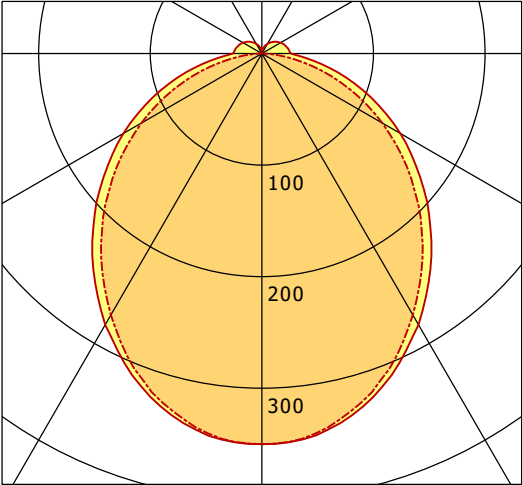

	C0	C90	C180	C270
0°	350	350	350	350
15°	332	328	332	328
30°	281	271	281	271
45°	213	200	213	200
60°	143	125	143	125
75°	75	51	75	51
90°	26	1	26	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

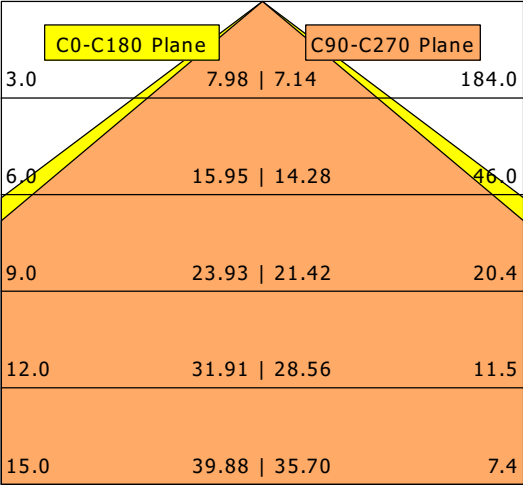

η	LED
Efficiency	148 lm/W
Direct/Indirect	↓ 93% / ↑ 7%
System Power	32 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	25.1
UGR C90/C270	24.4
CIE Flux Codes	48 78 94 93 100
Ra/CRI	> 80