


LK-L 070.11830.1405.U19/DALI


Lichtkanal 070 | Light-Insert (APB, 1xLED 24W 830/3000K 3300lm)

— C0/C180 cd / 1000 lm - - - C90/C270

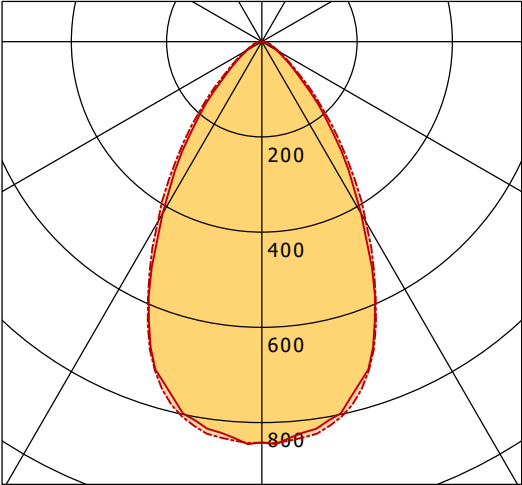

	C0	C90	C180	C270
0°	842	842	842	842
15°	757	774	757	774
30°	417	437	417	437
45°	130	152	130	152
60°	35	41	35	41
75°	15	16	15	16
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

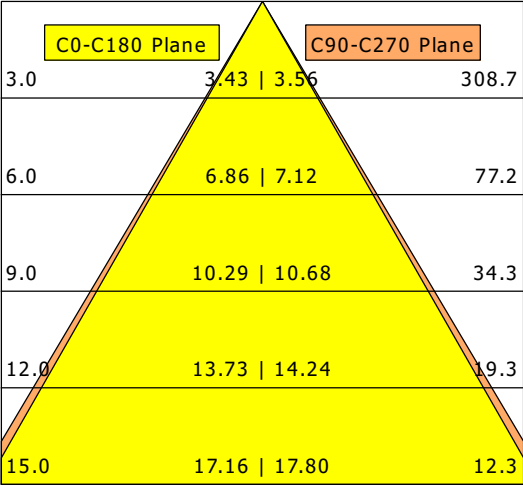

η		LED
Efficiency		138 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		24 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.2
UGR C90/C270		17.7
CIE Flux Codes		79 95 99 100 100
Ra/CRI		> 80