


DWI-A 105.1498.840/DALI


Dwide | Decke (1xLED 43W 840/4000K 5600lm)

— C0/C180 cd / 1000 lm - - - C90/C270

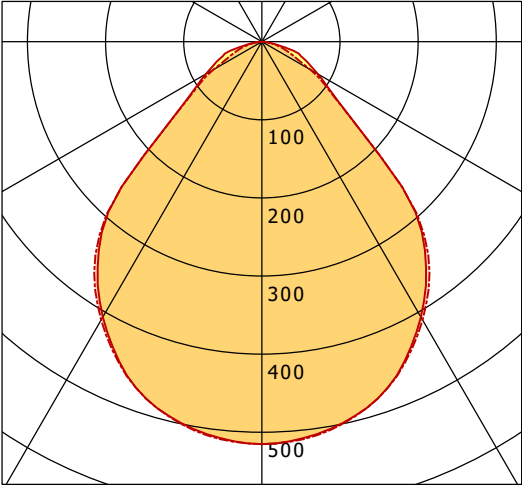

	C0	C90	C180	C270
0°	515	515	515	515
15°	491	491	491	491
30°	407	411	407	411
45°	233	234	233	234
60°	83	72	83	72
75°	37	23	37	23
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

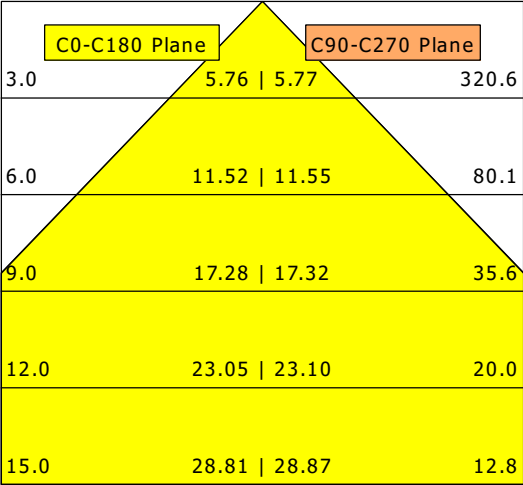

η		LED
Efficiency		130 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		43 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.8
UGR C90/C270		18.0
CIE Flux Codes		65 90 98 100 100
Ra/CRI		> 80