



SCELP 501.2030.55/DALI

Scene 5 (1xLED 27W 830/3000K 2750lm 55 °)

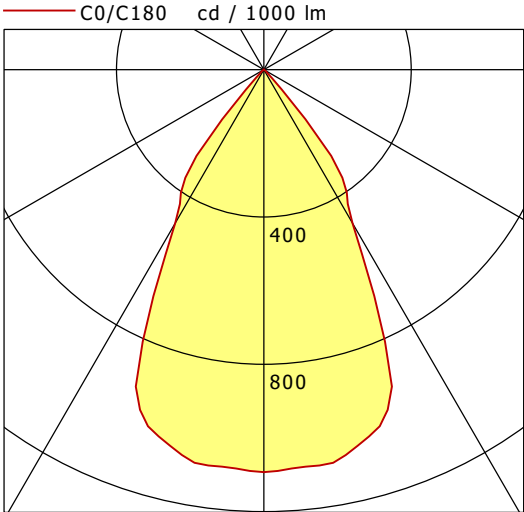

	C0	C90	C180	C270
0°	1093	1093	1093	1093
15°	1044	1044	1044	1044
30°	481	481	481	481
45°	20	20	20	20
60°	2	2	2	2
75°	2	2	2	2
90°	0	0	0	0
cd / 1000 lm				

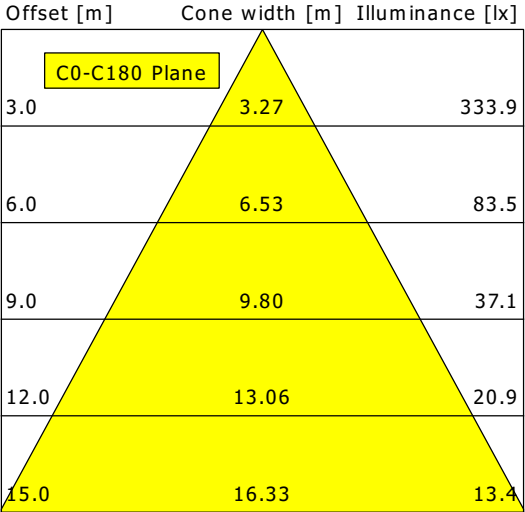

η		LED
Efficiency		102 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.7
UGR C90/C270		18.7
CIE Flux Codes	97 99 100 100 100	
Ra/CRI		>80