


SCELP 501.2027.35/DALI

Scene 5 (1xLED 27W 827/2700K 2510lm 35 °)

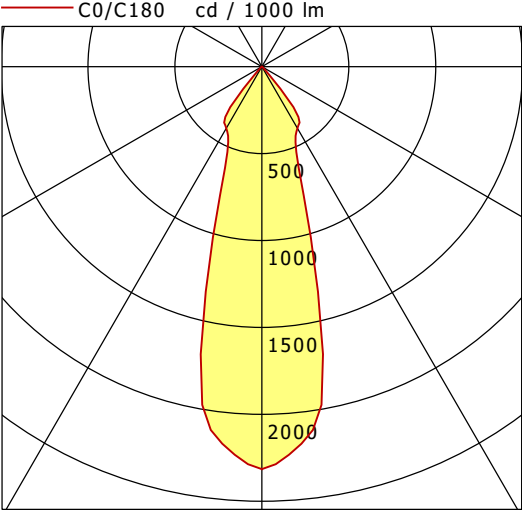

	C0	C90	C180	C270
0°	2315	2315	2315	2315
15°	1169	1169	1169	1169
30°	409	409	409	409
45°	21	21	21	21
60°	3	3	3	3
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	1.62	645.7
6.0	3.23	161.4
9.0	4.85	71.7
12.0	6.47	40.4
15.0	8.09	25.8

η		LED
Efficiency		93 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.0
UGR C90/C270		18.0
CIE Flux Codes	97 100 100 100 100	
Ra/CRI		> 80