


LUNXXS 301.840.1/DALI


Lunata XXSmall (1xLED 17W 840/4000K 1470lm)

— C0/C180 cd / 1000 lm - - - C90/C270

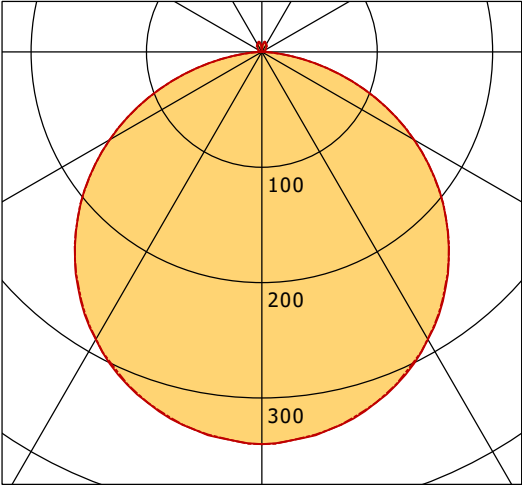

	C0	C90	C180	C270
0°	340	340	340	340
15°	326	325	326	325
30°	288	287	288	287
45°	229	229	229	229
60°	152	152	152	152
75°	64	64	64	64
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

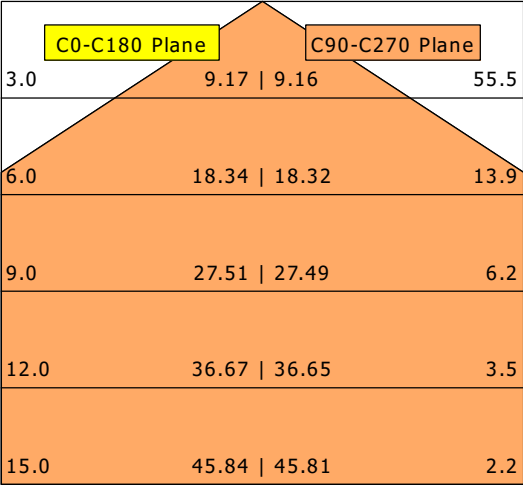

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 98% / ↑ 2%
System Power	17 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	22.6
UGR C90/C270	22.6
CIE Flux Codes	47 79 96 98 100
Ra/CRI	> 80