


DWI-A 305.1498.840/DALI


Dwide | Decke (1xLED 49W 840/4000K 5700lm)

— C0/C180 cd / 1000 lm - - - C90/C270

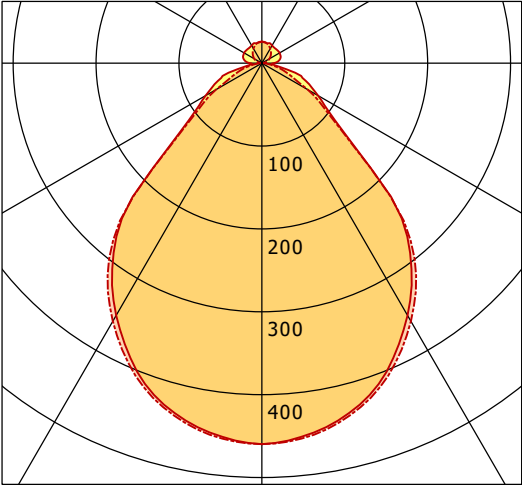

	C0	C90	C180	C270
0°	460	460	460	460
30°	351	360	351	360
60°	78	64	78	64
90°	14	1	14	1
120°	25	11	25	11
150°	25	20	25	20
180°	26	26	26	26
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

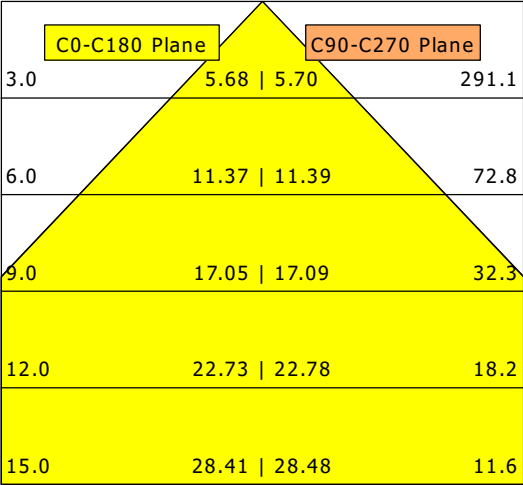

η	LED
Efficiency	116 lm/W
Direct/Indirect	↓ 89% / ↑ 11%
System Power	49 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.1
UGR C90/C270	16.9
CIE Flux Codes	64 89 98 89 100
Ra/CRI	> 80