


SCOUT 205.930.OR46/DALI-ST


Scout Next (1xLED 46W 930/3000K 4830lm)

— C0/C180 cd / 1000 lm - - - C90/C270

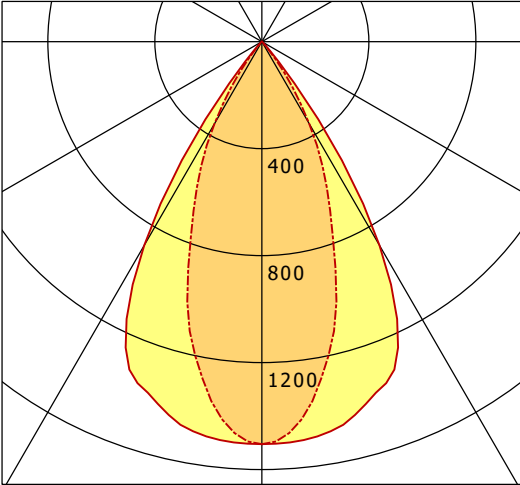

	C0	C90	C180	C270
0°	1505	1505	1505	1505
15°	1424	1066	1424	1066
30°	880	354	880	354
45°	15	5	15	5
60°	2	2	2	2
75°	1	1	1	1
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

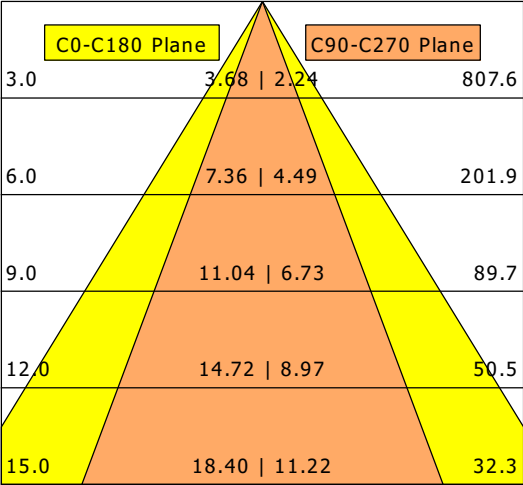

η		LED
Efficiency		105 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		46 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		24.5
UGR C90/C270		19.3
CIE Flux Codes	99 100 100 100 100	
Ra/CRI		> 90