



LED recessed downlight set, IP54, phase dimmable
Artikel-Nr. 39267083

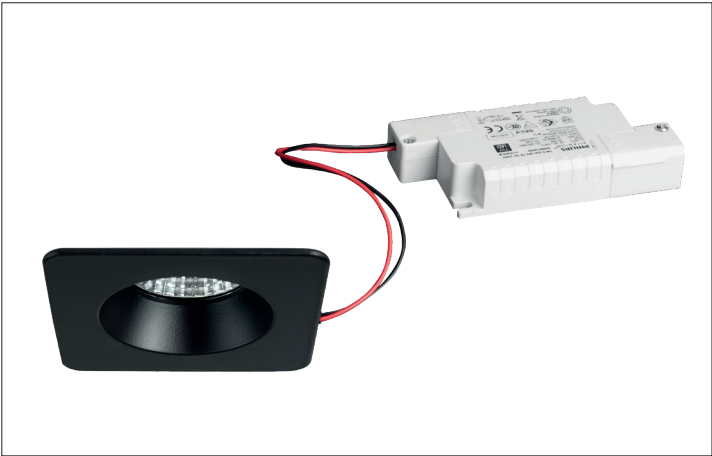

LED recessed downlight set, IP54, phase dimmable, white, square. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass / Plastic, Degree of protection: according to DIN EN 60529 IP54*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 540lm, Colour temperature: 2.700 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: Trailing-edge phase.

Artikel-Nr.	39267083
Stand:	25.10.2021 20:47
Colour temperature	2700 K
Colour	White
Length	82 mm
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass / Plastic
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	Trailing-edge phase
Built-in diameter	68 mm
Installation depth	58 mm
Voltage	230V AC 50Hz
Degree of protection	IP54 *
Protection class	II
Circlip	Without circlip
Adjustability	Not adjustable
Length	82 mm
Width	82 mm
Circuit type	Parallel conduction