


ML-P 070.10840.3 19P/DALI


Monoline 070 | Pendant (1xLED 15W 840/4000K 2400lm)

— C0/C180 cd / 1000 lm - - - C90/C270

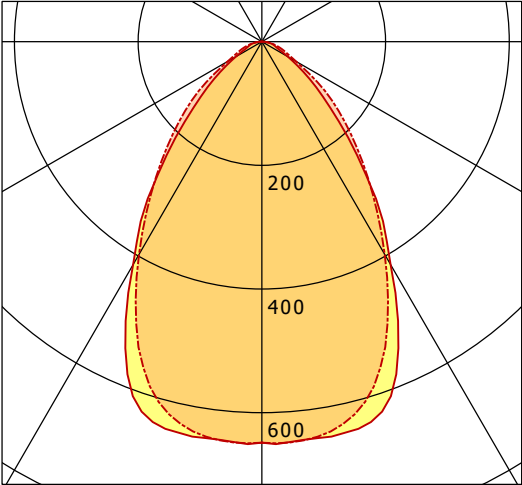

	C0	C90	C180	C270
0°	649	649	649	649
15°	643	614	643	614
30°	416	397	416	397
45°	166	196	166	196
60°	49	64	49	64
75°	19	24	19	24
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

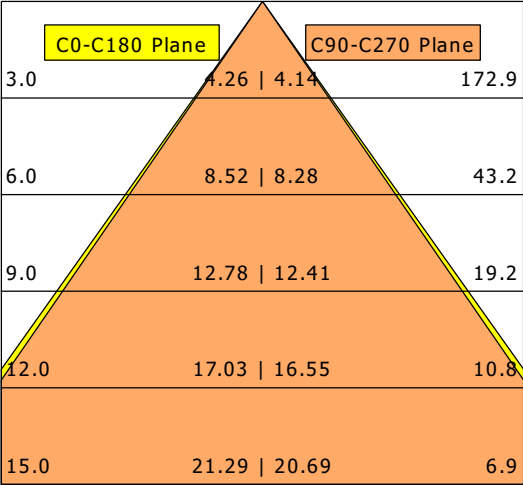

η		LED
Efficiency		160 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		15 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		17.9
UGR C90/C270		18.7
CIE Flux Codes		72 93 98 100 100
Ra/CRI		> 80