


SCELP 401.2027.15/DALI

Scene 4 (1xLED 27W 827/2700K 2580lm 15 °)

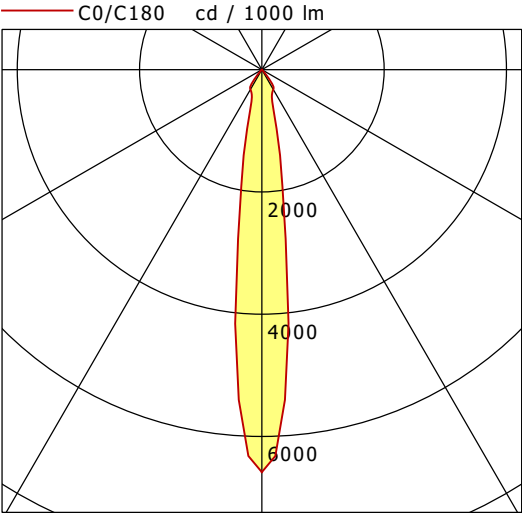

	C0	C90	C180	C270
0°	6584	6584	6584	6584
15°	829	829	829	829
30°	373	373	373	373
45°	18	18	18	18
60°	1	1	1	1
75°	0	0	0	0
90°	0	0	0	0
cd / 1000 lm				

Offset [m]	Cone width [m]	Illuminance [lx]
C0-C180 Plane		
3.0	0.76	1887.3
6.0	1.51	471.8
9.0	2.27	209.7
12.0	3.03	118.0
15.0	3.78	75.5

η		LED
Efficiency		96 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		27 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		18.9
UGR C90/C270		18.9
CIE Flux Codes	98 100 100 100 100	
Ra/CRI		> 80