


# LUZ-T14 103.830.BW/DALI-ST


LUZ | Track-Mounted (1xLED 22W 830/3000K 3280lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

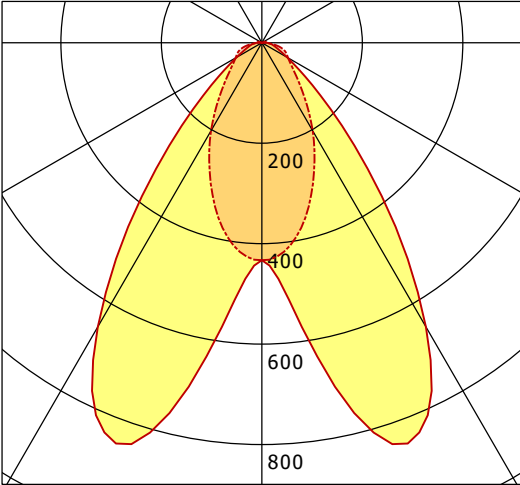

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 433 | 433 | 433  | 433  |
| 15°          | 785 | 349 | 785  | 349  |
| 30°          | 653 | 203 | 653  | 203  |
| 45°          | 209 | 99  | 209  | 99   |
| 60°          | 58  | 60  | 58   | 60   |
| 75°          | 26  | 41  | 26   | 41   |
| 90°          | 10  | 2   | 10   | 2    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

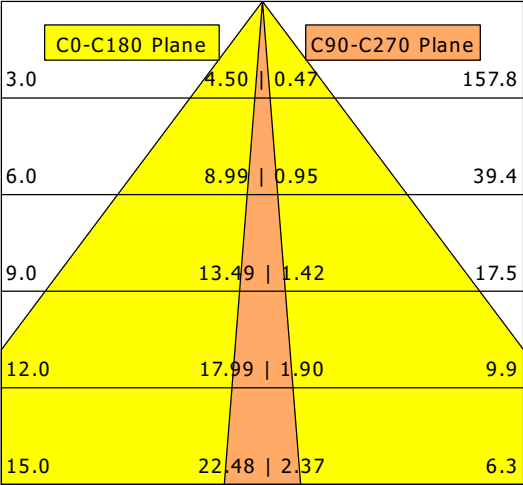

|                    |                 |
|--------------------|-----------------|
| <b>η</b>           | LED             |
| Efficiency         | 149 lm/W        |
| Direct/Indirect    | ↓ 99% / ↑ 1%    |
| System Power       | 22 W            |
| <b>UGR</b>         | X=4H, Y=8H      |
| Reflection factors | 70/50/20        |
| UGR C0/C180        | 20.1            |
| UGR C90/C270       | 21.7            |
| CIE Flux Codes     | 71 90 97 99 100 |
| Ra/CRI             | > 80            |