
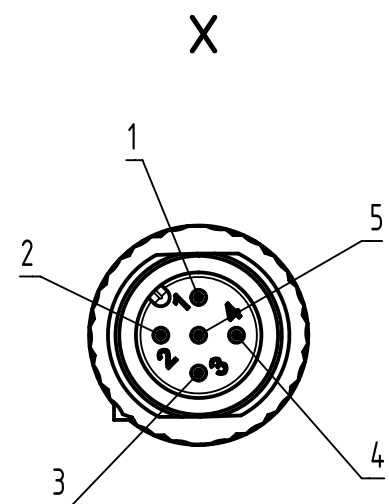




Connector Location A

Connector Location B

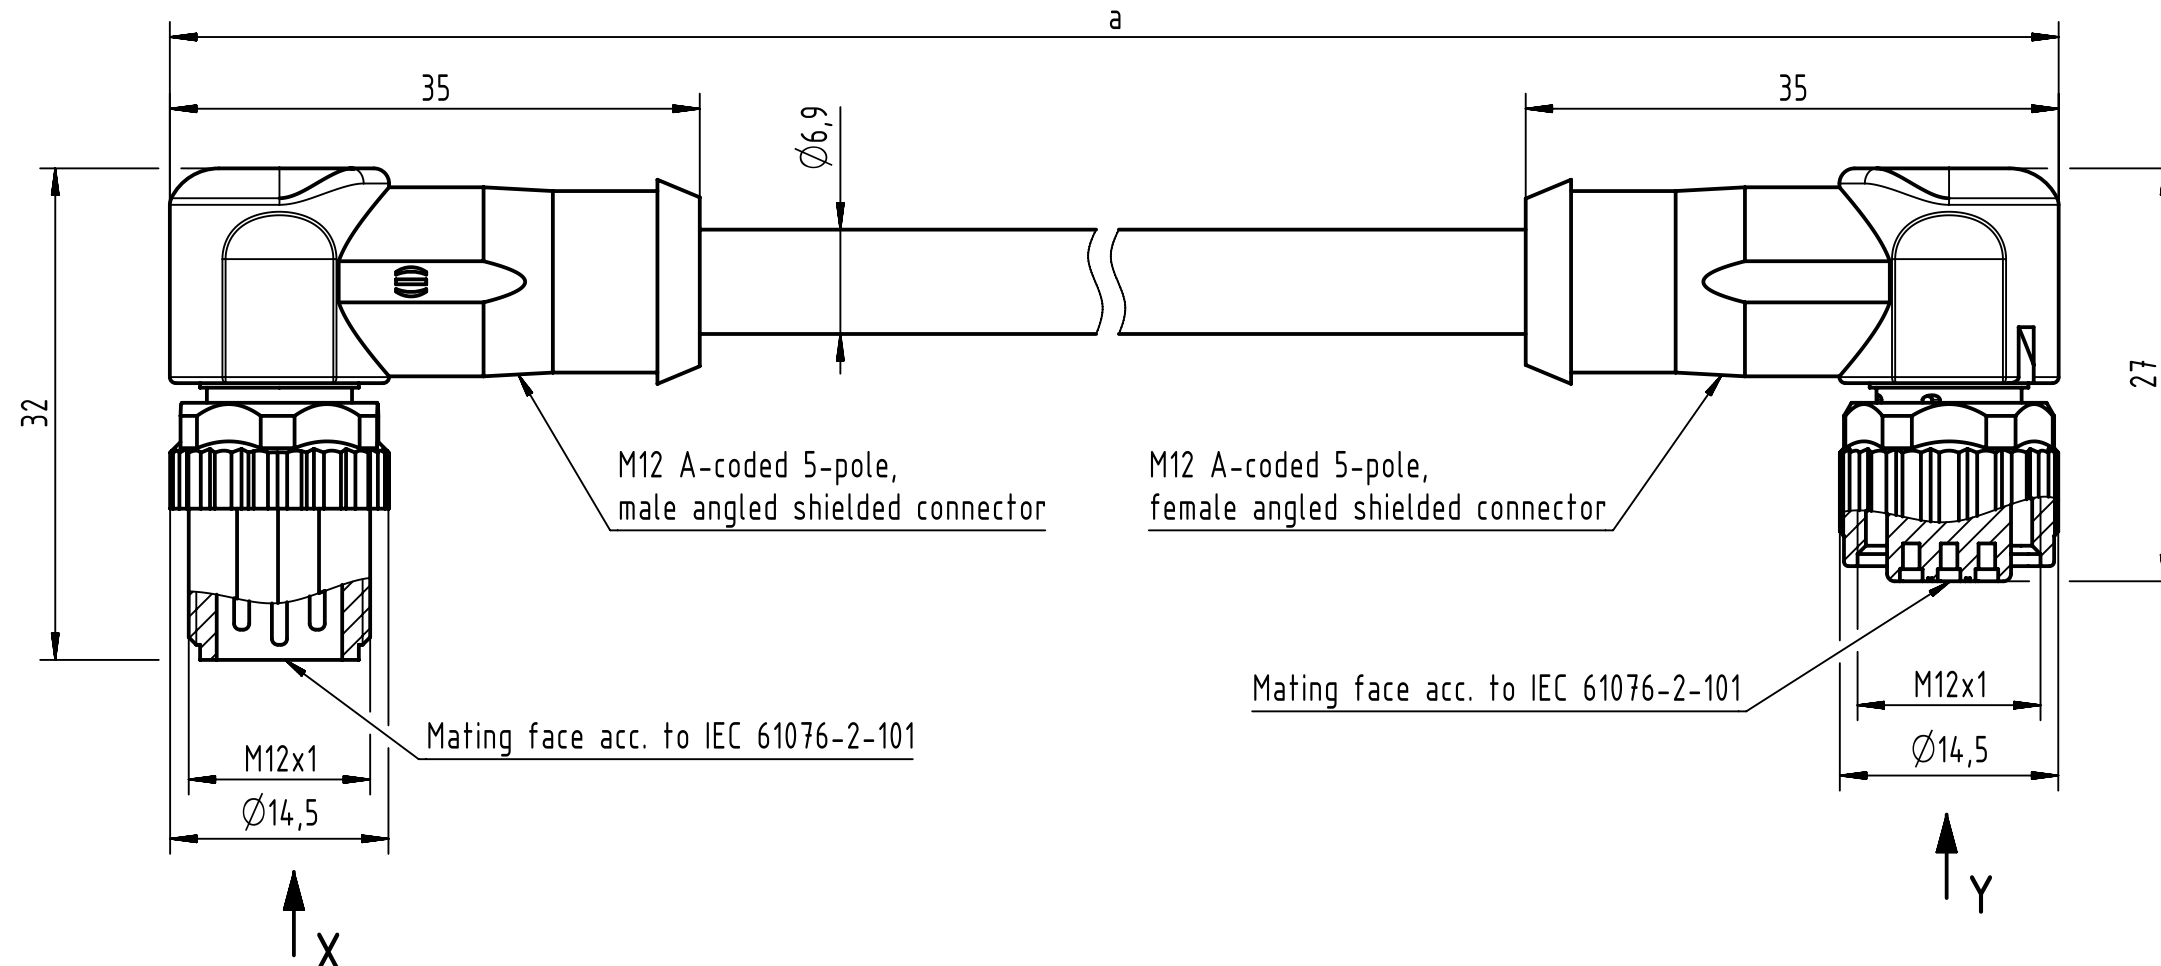

Loading-Plan

1	Shield	1
2	Red (+)	2
3	Black (-)	3
4	White (CAN H)	4
5	Blue (CAN L)	5

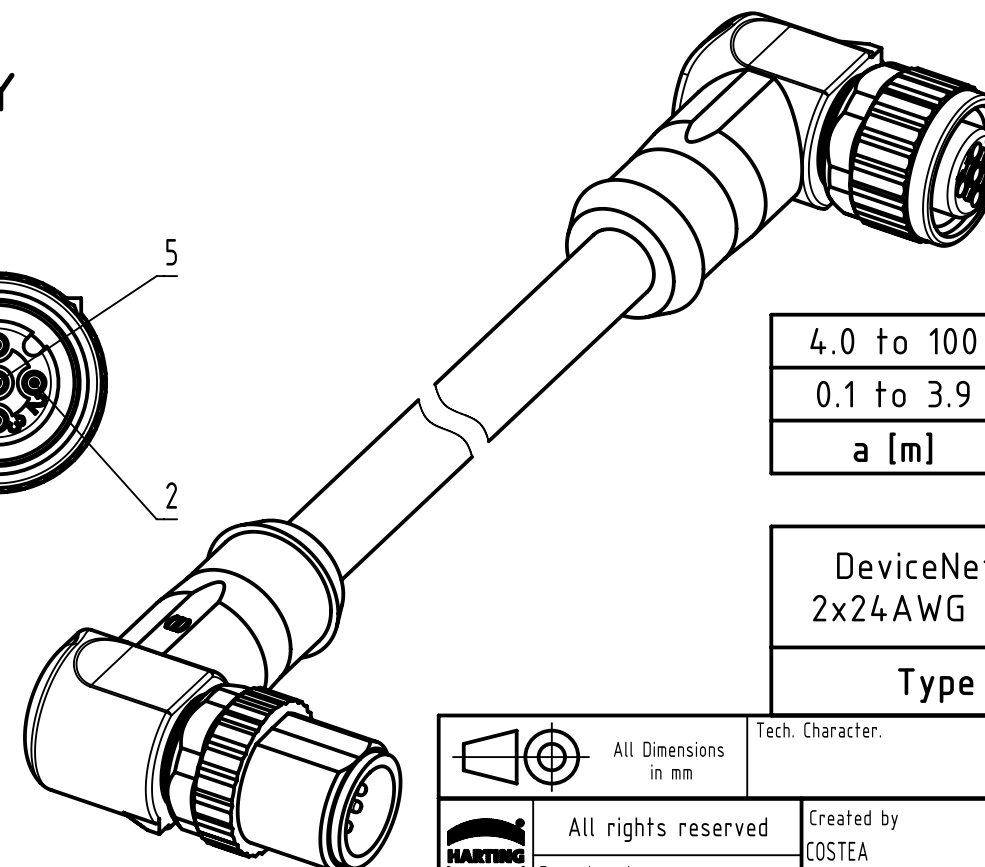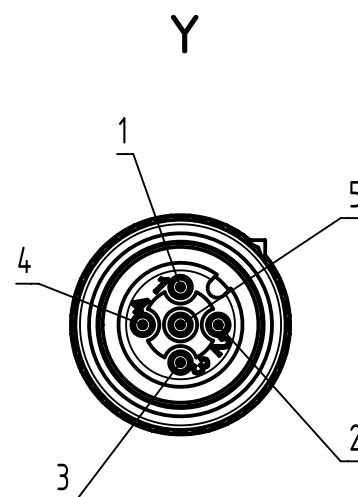

4.0 to 100	+1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
	0.1	XXX=001
Step	a [m]	XXX

DeviceNet 2x22AWG, 2x24AWG UL violet PUR	2134D277572XXX
Type of cable	Part no.

- Protection level: IP67
- Temperature range: -30°C ... +80°C

 All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
	All rights reserved	Created by COSTEA	Inspected by MUNTEANV	Standardisation MUNTEANV	Date 2018-01-23	State Final Release	
	Department HCS - RO	Title M12 A-coded Cable Assembly					Doc-Key / ECM-Nr. 100751430/UGD/009/A 500000130387
HARTING Customised Solutions D-32339 Espelkamp		Type TB	Number 2134D277572XXX			Rev. A	Page 1/1