


SKIXL-A 118.840.1/DALI


Skive XLarge | Anbau (1xLED 156W 840/4000K 18620lm)

— C0/C180 cd / 1000 lm - - - C90/C270

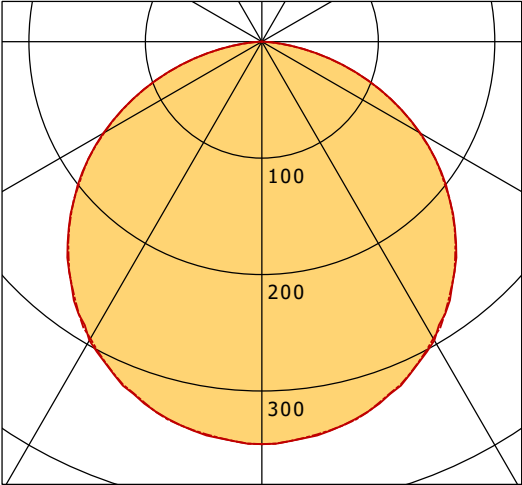

	C0	C90	C180	C270
0°	346	346	346	346
15°	332	333	332	333
30°	296	294	296	294
45°	235	235	235	235
60°	157	156	157	156
75°	66	66	66	66
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

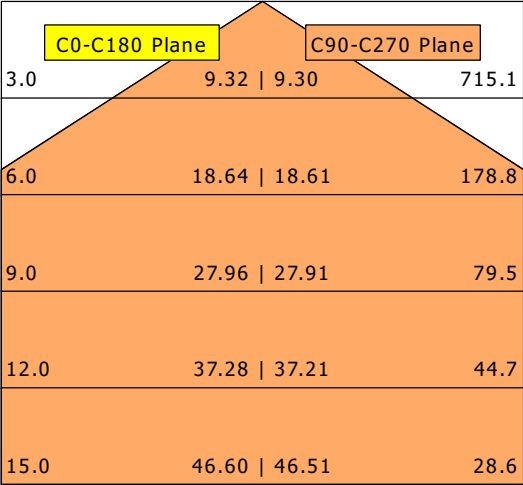

η		LED
Efficiency		119 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		156 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.5
UGR C90/C270		23.5
CIE Flux Codes		47 79 96 100 100
Ra/CRI		> 80