

Article datasheet 1208

STATUS 11/2022

Art. No.:	1208
Article:	Aluwalk M CBS
Custom tariff number:	94056180
Autonomy time:	Zentralbatterie
Operating mode:	Dauer- oder Bereitschaftsschaltung
Viewing distance:	25 m
Input voltage -frequency:	230V AC/DC 50/60Hz
Protection type:	IP41
[x Max. Leistung]	4,6VA
Ambient temperature:	-5°C...50°C




Aluwalk M CBS

Exit sign Aluwalk M | CBS | universal mounting | 1,8W | IP41 | 230V AC/DC | VD 25m

Exit sign edge luminaire, made of first-class, recyclable aluminum extrusions. Silver housing color due to elaborate and high-quality anodizing. Can be mounted on wall or ceiling thanks to universal mounting, the accessories for this are already included. Housing can be opened without tools, complete with all electrical operating and lighting equipment, for quick and easy installation. Including quick-connect terminal system for up to 2.5mm² cable cross-section (suitable for through-wiring). Illuminant (LED) in eye-friendly, neutral white light color (4000K; 840). Homogeneous, standard-compliant illumination of the pictograms through light-optimized acrylic glass pane. The pictogram set (down, right, left, up) for one- or two-sided escape route marking is part of the standard scope of delivery.

Size drawing

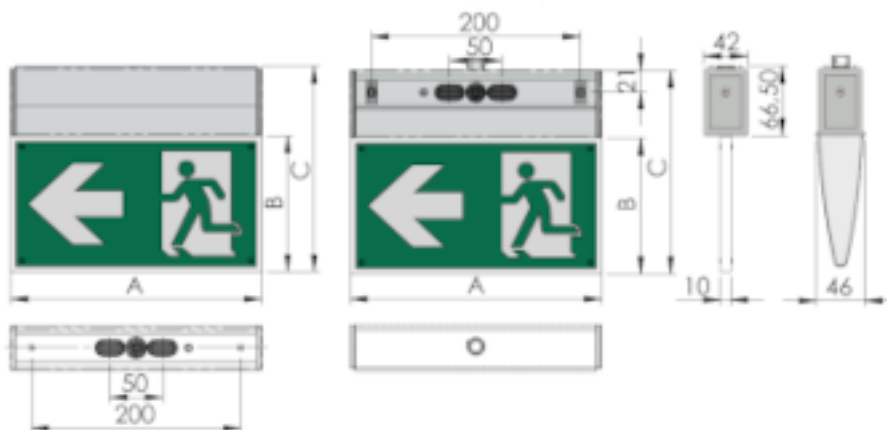

Weight & dimensions

Width (mm): 240

Height (mm): 42

Depth (mm): 197

