


EL 307.40.2


EuroLED 300 | Track-Mounted (1xLED 57W 840/4000K 7990lm 75°)

— C0/C180 cd / 1000 lm - - - C90/C270

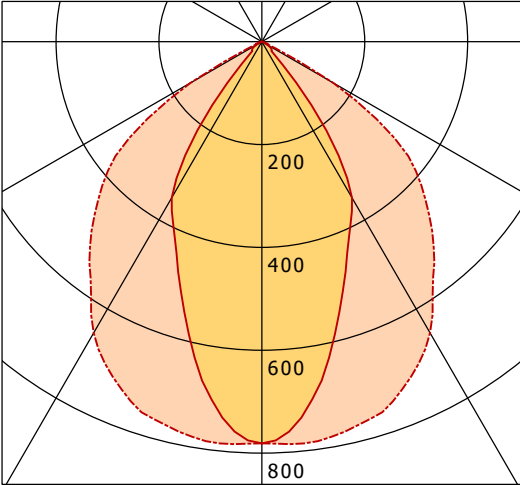

	C0	C90	C180	C270
0°	781	781	781	781
15°	566	766	566	766
30°	350	654	350	654
45°	29	455	29	455
60°	12	160	12	160
75°	1	6	1	6
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

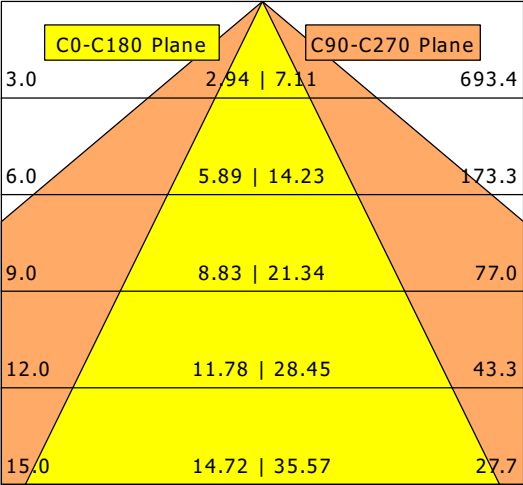

η		LED
Efficiency		140 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		57 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.4
UGR C90/C270		30.9
CIE Flux Codes		76 98 100 100 100
Ra/CRI		> 80