


ML-P 060.11840.2 19W /DALI


Monoline 060 | Pendant | Glare Control (1xLED 19W 840/4000K 2720lm)

— C0/C180 cd / 1000 lm - - - C90/C270

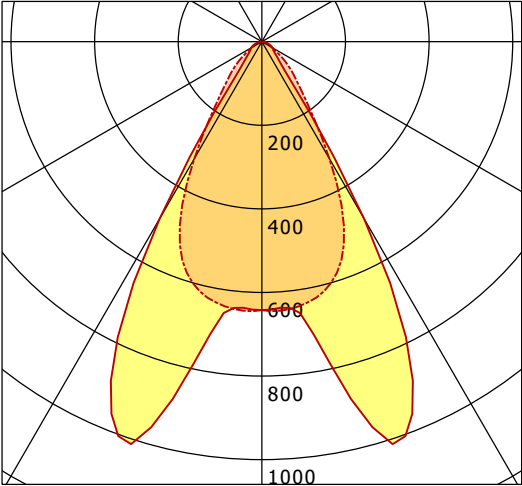

	C0	C90	C180	C270
0°	642	642	642	642
15°	923	608	923	608
30°	489	323	489	323
45°	51	103	51	103
60°	30	28	30	28
75°	14	8	14	8
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

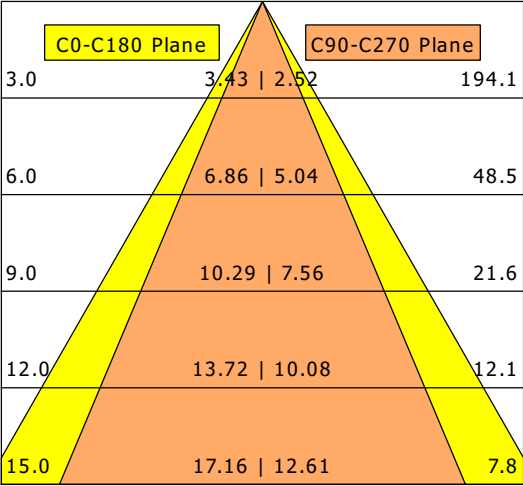

η		LED
Efficiency		143 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		19 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		15.9
UGR C90/C270		17.8
CIE Flux Codes		86 97 99 100 100
Ra/CRI		>80