


MILA-A 104.1500.840/DALI


Mila | Ceiling (1xLED 26W 840/4000K 3710lm)

— C0/C180 cd / 1000 lm - - - C90/C270

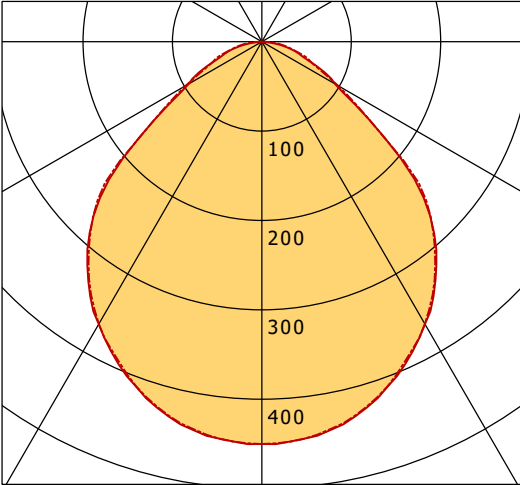

	C0	C90	C180	C270
0°	450	450	450	450
15°	429	428	429	428
30°	365	365	365	365
45°	262	264	262	264
60°	94	98	94	98
75°	36	37	36	37
90°	0	0	0	0
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

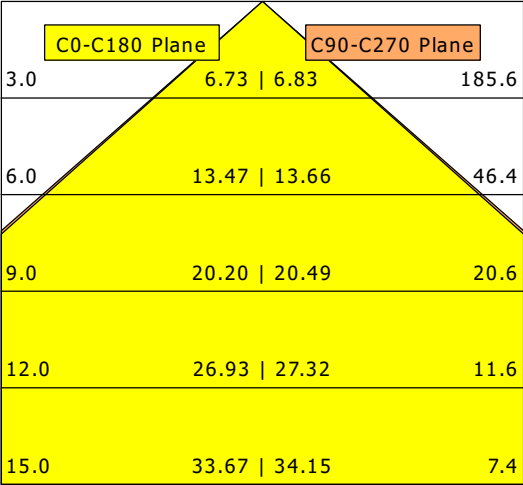

η		LED
Efficiency		143 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		26 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		19.0
UGR C90/C270		19.4
CIE Flux Codes		58 88 97 100 100
Ra/CRI		> 80