



FLIR 100.1030.25/DALI

Flixx 100 Round (FLIRZ 100.05, 1xLED 15W 830/3000K 1370lm 15 °)

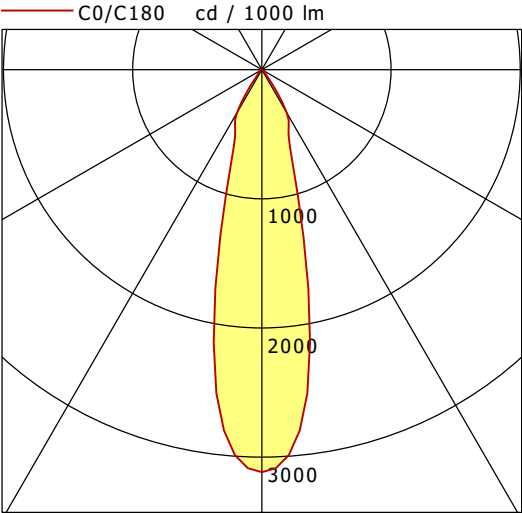

	C0	C90	C180	C270
0°	3116	3116	3116	3116
15°	1159	1159	1159	1159
30°	385	385	385	385
45°	34	34	34	34
60°	21	21	21	21
75°	9	9	9	9
90°	0	0	0	0
cd / 1000 lm				

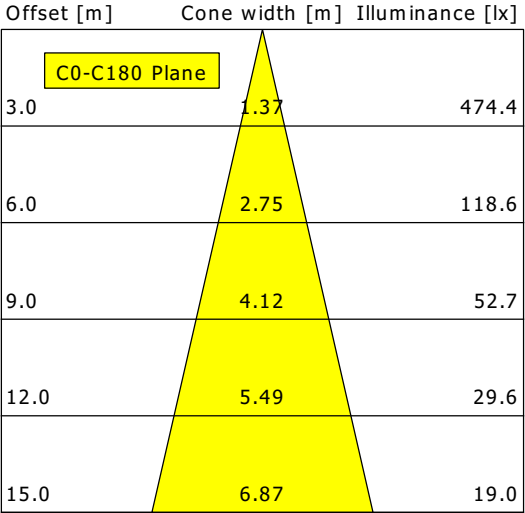

η		LED
Efficiency		92 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		15 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		23.0
UGR C90/C270		23.0
CIE Flux Codes		93 97 99 100 100
Ra/CRI		> 80