


# LK-L 070.10830.2245.U16/DALI


Lichtkanal 070 | Light-Insert (APB, 1xLED 24W 830/3000K 3340lm)

— C0/C180    cd / 1000 lm    - - - C90/C270

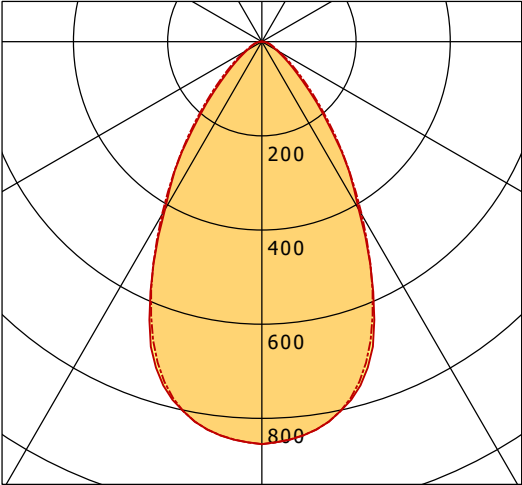

|              | C0  | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0°           | 855 | 855 | 855  | 855  |
| 15°          | 773 | 766 | 773  | 766  |
| 30°          | 411 | 425 | 411  | 425  |
| 45°          | 132 | 145 | 132  | 145  |
| 60°          | 36  | 42  | 36   | 42   |
| 75°          | 15  | 16  | 15   | 16   |
| 90°          | 0   | 0   | 0    | 0    |
| cd / 1000 lm |     |     |      |      |

Offset [m]    Cone width [m]    Illuminance [lx]

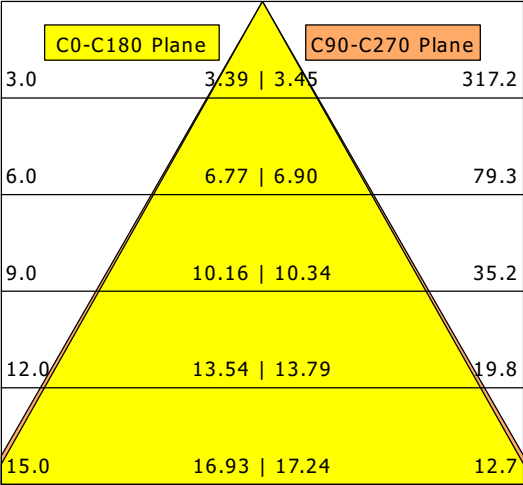

|                    |                  |
|--------------------|------------------|
| <b>η</b>           | LED              |
| Efficiency         | 139 lm/W         |
| Direct/Indirect    | ↓ 100% / ↑ 0%    |
| System Power       | 24 W             |
| <b>UGR</b>         | X=4H, Y=8H       |
| Reflection factors | 70/50/20         |
| UGR C0/C180        | 15.7             |
| UGR C90/C270       | 16.1             |
| CIE Flux Codes     | 79 95 99 100 100 |
| Ra/CRI             | > 80             |