


PLL 26.475.40.2/DALI

PL 26 (1xLED 49W 840/4000K 4200lm)

— C0/C180 cd / 1000 lm - - - C90/C270

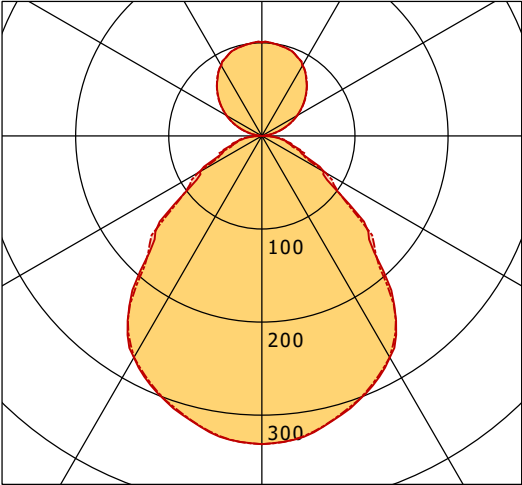

	C0	C90	C180	C270
0°	331	331	331	331
30°	275	275	275	275
60°	77	79	77	79
90°	1	1	1	1
120°	44	44	44	44
150°	87	88	87	88
180°	101	101	101	101
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	86 lm/W
Direct/Indirect	↓ 71% / ↑ 29%
System Power	49 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.8
UGR C90/C270	18.0
CIE Flux Codes	60 87 97 71 100
Ra/CRI	> 80