
lightnet

Matric-RX

Pendant light-line - Direct/indirect light distribution

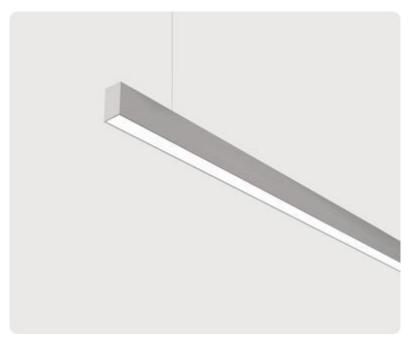

Illustrations may only be similar and serve as an orientation.

Matric-RX. LED. Pendant light-line. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Wall-Washer for asymmetrical light distribution. Switchable. LxWxH (rectangular). L=1765mm. W=40mm. H=75mm. Single-cord suspension (Set). Pendant length max 1500mm. Power supply: transparent. Ceiling rose:

Matching luminaire's surface colour. Medium-power current. 6110lm. 54W. 4,8kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated

Article code: LRXGEE-840M-L1765-A


lightnet


Matric-RX

Pendant light-line - Direct/indirect light distribution

Article code: LRXGEE-840M-L1765-A







Customer / Project:		
Note:		

Productname Matric-RX Lamp LED

Installation Type Pendant light-line Surface finish Silver Anodised

Light characteristics Direct/indirect light distribution

4000K Colour temperature Colour Rendering Index (CRI) CRI>80 Optical system Wall-Washer Control Switchable Length L/Diameter D (mm) L=1765mm Width W (mm) W=40mm Height H (mm) H=75mm Current/Power Medium-Power Luminous Flux 6110lm

Suspension Single susp. (Set)

Ceiling rose colour Ceiling rose: Matching luminaire`s

54W

surface colour

Pendant length (mm) Pendant length max 1500mm

Degree of protection IP20

Power consumption

Certification Prüfzeichen: ENEC

Cable Colour Power supply: transparent LED lifetime L85B10 (tq 25°C) = 50.000h

Photometric code 8 40 / 3 3 9 Photobiological class RG0 (EN62471)

Indoor/Outdoor Indoor: ta [ambient] max. 25°C

Weight (kg) 4,8kg

