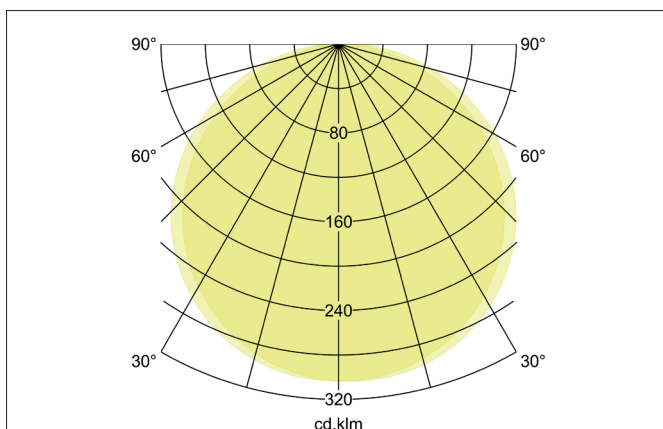
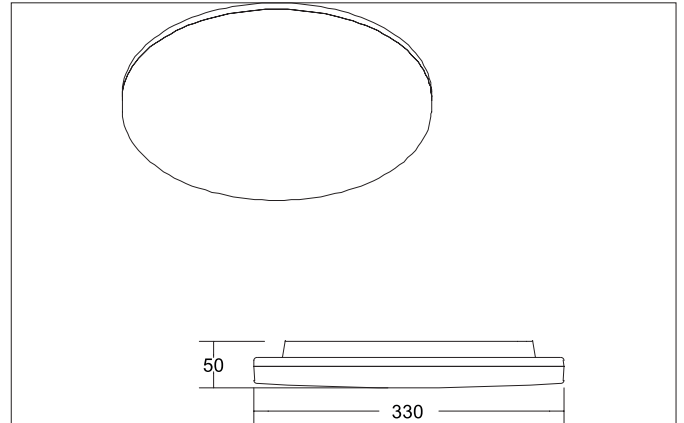


**BYAM-R MAXI LED Surface-mounted ceiling light, 3CCT, Multipower****17/24 W, IP65, switchable**

Article no. 12512073

Light.  
For Generations.**Tender**

LED Surface-mounted ceiling light, 3CCT, Multipower 17/24 W, IP65, switchable, Round. Luminaire diameter 330.0 mm, Height 50.0 mm. Weight 1.075 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 2.622 lm, Power 1 x 24 W, Light colour warm white to daylight white, Correlated color temperature (CCT) 3.000 - 5.700 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Plastic, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK10. With electronic driver, on/off switchable.

**Product Benefits**

- Flache Anbauleuchte (Durchmesser 330 mm, Höhe 50 mm, mit Multipower-Funktion 17 W / 24 W) zur Decken- oder Wandmontage.
- 3 CCT einstellbar: 3.000 K / 4.000 K / 5.700 K.
- Lichtströme 24 W: 3.000 K: 2.622 lm, 4.000 K: 2.850 lm, 5.700 K: 2.736 lm
- In drei Größen und 2 Formen (rund / quadratisch) verfügbar.
- Schaltbare Ausführung.

**BYAM-R MAXI LED Surface-mounted ceiling light, 3CCT, Multipower**  
**17/24 W, IP65, switchable**  
Article no. 12512073

Light.  
For Generations.

Article data	
Article no.	12512073
GTIN	4255752500827
Series name	BYAM-R MAXI
Short description	LED Surface-mounted ceiling light, 3CCT, Multipower 17/24 W, IP65, switchable
Material	Plastic
Colour	White
Type of surface	Matt
Shape	Round
Outer diameter	330 mm
Hight	50 mm
Scope of delivery	inkl. Konverter mit Leistungs- und Farbtemperaturanwahlmöglichkeit zum Anschluss an 230 V-Netzspannung, schaltbar
Weight	1.075 kg

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Light colour	White
Light output	Direct
Luminous flux	2,622 lm
System efficiency	109 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	24 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP65
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK10
stamp	UKCA
Material cover	Plastic, opal

Packing data	
Gross weight	1.125 kg
Length of packaging	340 mm
Packaging width	340 mm
Packaging hight	60 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

**BYAM-R MAXI LED Surface-mounted ceiling light, 3CCT, Multipower**  
**17/24 W, IP65, switchable**  
Article no. 12512073

Light.  
For Generations.