


LED reflector insert MR16, 3 W, 350 mA
Article no. 12926003

Light.
For Generations.

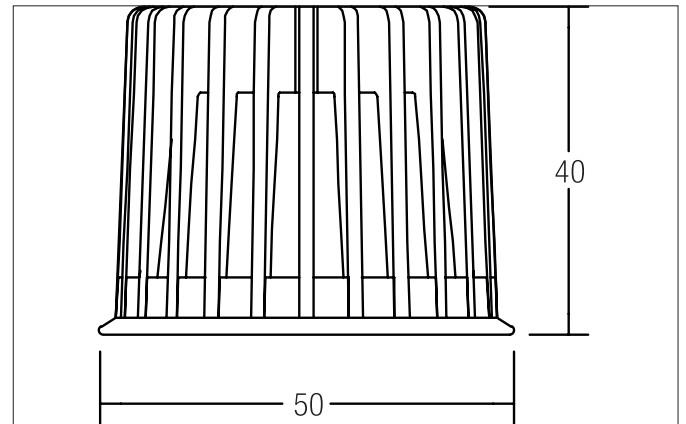

Tender

LED reflector insert MR16, 3 W, white, round. Lamp holder: Plug&Play, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Current: 350 mA, Power: 3W, Luminous flux: 310lm, Colour temperature: 3.000 K, Beam angle: 38°, Control: Dimming depending on driver.

| Article data | |
|-------------------|--|
| Article no. | 12926003 |
| GTIN | 4250047792536 |
| Short description | LED reflector insert MR16, 3 W, 350 mA |
| Material | Aluminium / Glass |
| Colour | White |
| Shape | Round |
| Outer diameter | 50 mm |
| Height | 40 mm |
| Weight | 0.079 kg |

| Lighting technology | |
|---------------------|------------|
| Colour temperature | 3000 K |
| Light colour | White |
| Luminous flux | 310 lm |
| System efficiency | 103 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | High-gloss |
| Beam angle | 38° |
| Light sharing | Symmetric |






LED reflector insert MR16, 3 W, 350 mA

Article no. 12926003

Light.
For Generations.

| Operating technology of the luminaire | |
|---------------------------------------|-----------------------------|
| Voltage type | DC |
| Current | 350 mA |
| Lamp | LED |
| Lamp holder | Plug&Play |
| Protection class | III |
| Degree of protection | IP20 |
| Control | Dimming depending on driver |
| Bulb change possible | Yes |
| Rated life time L80/B20 at 25 °C | 50.000 h |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.09 kg |
| Length of packaging | 55 mm |
| Packaging width | 55 mm |
| Packaging height | 65 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

| Accessories | |
|---|--|
|  | Article no.: 17666000 LED converter 350 mA, on/off switchable Leistung: 1 - 5 W Abmessung: 52 mm x 30 mm x 23 mm |
|  | Article no.: 17662020 LED converter 350 mA, on/off switchable Leistung: 1 - 7,2 W Abmessung: 68 mm x 35 mm x 21 mm |
|  | Article no.: 17613000 LED converter 350 mA, on/off switchable Leistung: 1 - 15 W Abmessung: 115 mm x 34 mm x 19 mm |
|  | Article no.: 17621020 LED converter 350 mA, on/off switchable Leistung: 1 - 21 W Abmessung: 128 mm x 50 mm x 13 mm |
|  | Article no.: 17663020 LED converter 350 mA, trailing-edge phase dimmable Leistung: 2,8 - 7 W Abmessung: 110 mm x 50 mm x 19 mm |
|  | Article no.: 17648020 LED converter 350 mA, trailing-edge phase dimmable Leistung: 0,7 - 17 W Abmessung: 166 mm x 46 mm x 34 mm |