



TIBI-A 600.3840/DALI

Tibi Surface-Mounted (1xLED 30W 840/4000K 3880lm)

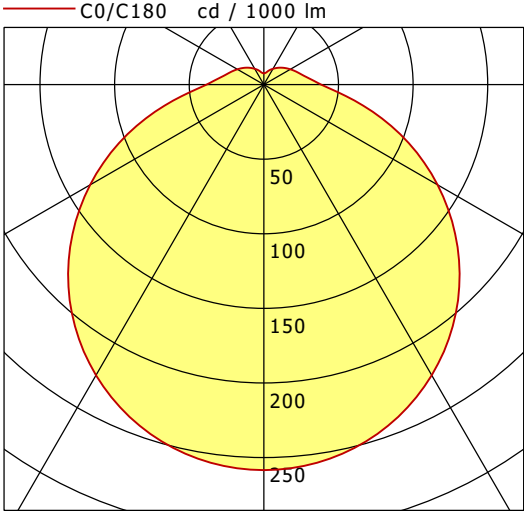

	C0	C90	C180	C270
0°	258	258	258	258
30°	225	225	225	225
60°	134	134	134	134
90°	38	38	38	38
120°	20	20	20	20
150°	12	12	12	12
180°	8	8	8	8
cd / 1000 lm				

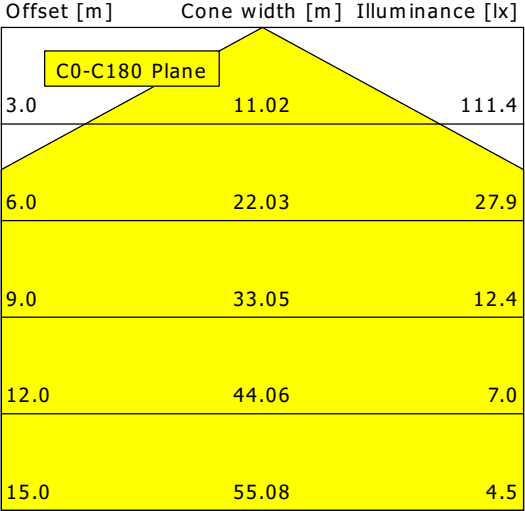

η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 87% / ↑ 13%
System Power	30 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.8
UGR C90/C270	21.8
CIE Flux Codes	41 71 90 87 100
Ra/CRI	> 80