


GLOB 300.2040.2/DALI

Globia (1xLED 20W 840/4000K 2470lm)

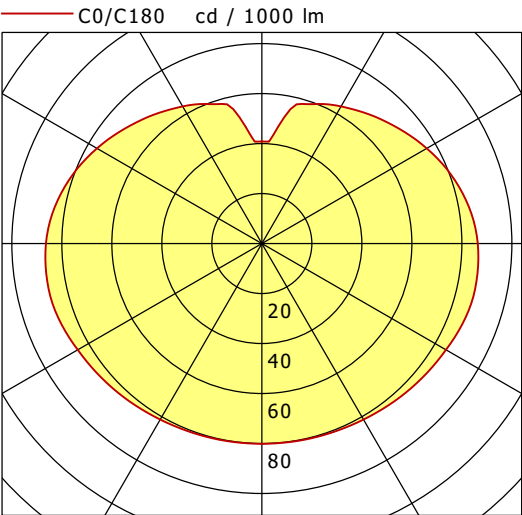

	C0	C90	C180	C270
0°	80	80	80	80
30°	81	81	81	81
60°	85	85	85	85
90°	86	86	86	86
120°	76	76	76	76
150°	63	63	63	63
180°	41	41	41	41
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	124 lm/W
Direct/Indirect	↓ 53% / ↑ 47%
System Power	20 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.8
UGR C90/C270	24.8
CIE Flux Codes	24 49 74 53 100
Ra/CRI	> 80