


LUNM 208.840.1/DALI


Lunata Medium (1xLED 77W 840/4000K 9130lm)

— C0/C180 cd / 1000 lm - - - C90/C270

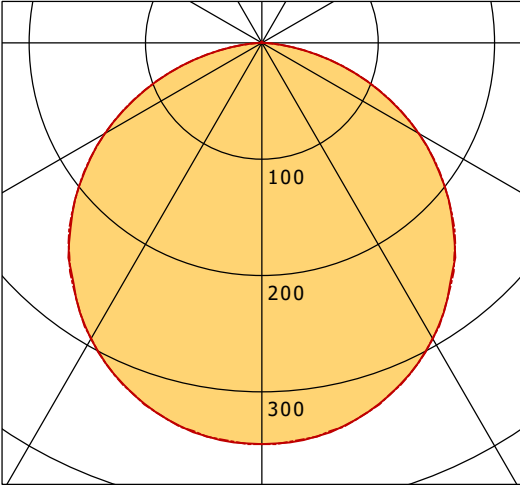

	C0	C90	C180	C270
0°	345	345	345	345
15°	332	332	332	332
30°	294	293	294	293
45°	233	235	233	235
60°	156	156	156	156
75°	66	66	66	66
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

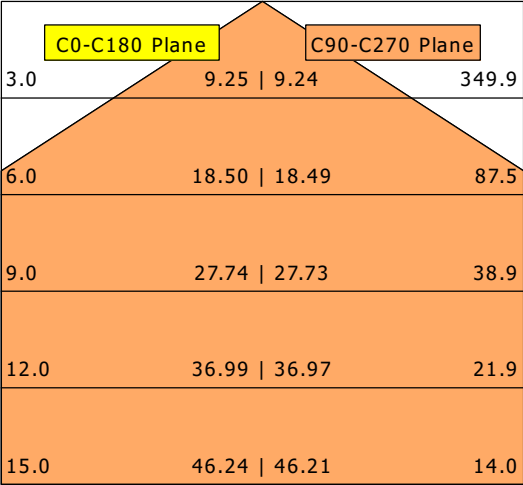

η		LED
Efficiency		119 lm/W
Direct/Indirect		↓ 100% / ↑ 0%
System Power		77 W
UGR		X=4H, Y=8H
Reflection factors		70/50/20
UGR C0/C180		22.1
UGR C90/C270		22.1
CIE Flux Codes		47 79 96 100 100
Ra/CRI		> 80