



Connector Location B




M12 A-coded 4-pole, straight overmolded, unshielded

Mating face acc. to IEC 61076-2-101


Mating face acc. to IEC 61076-2-101

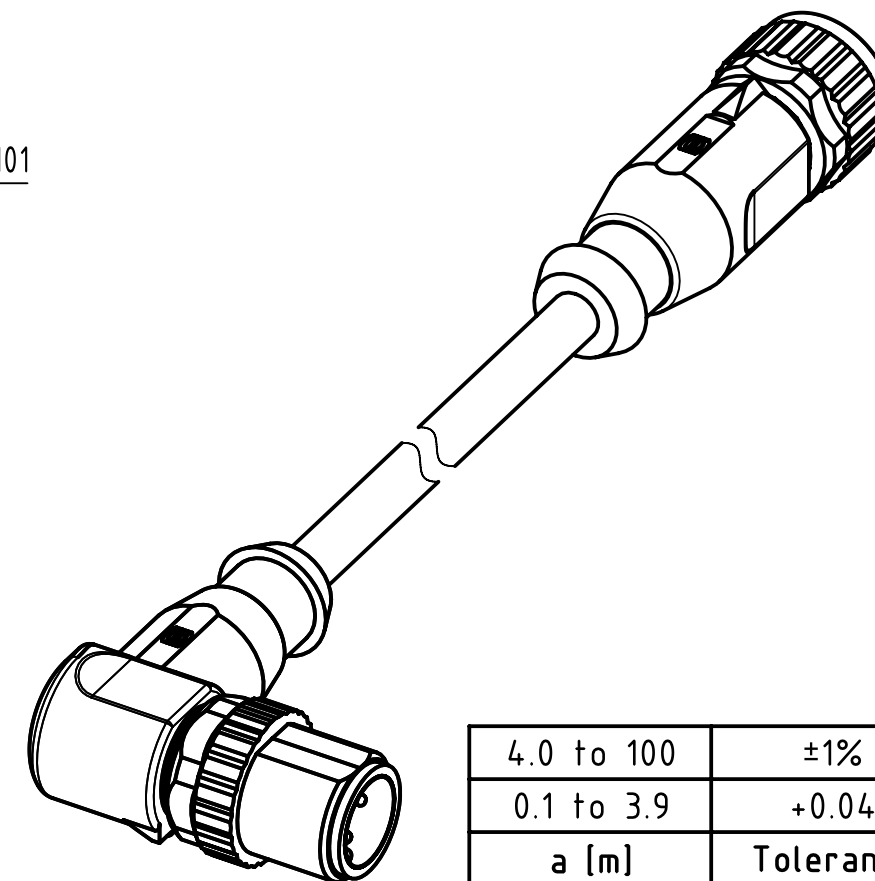

Y
female

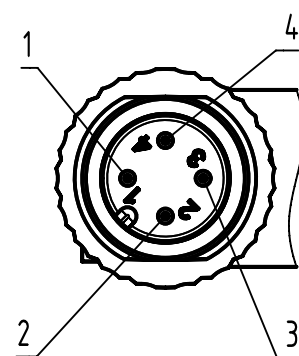

Loading Plan

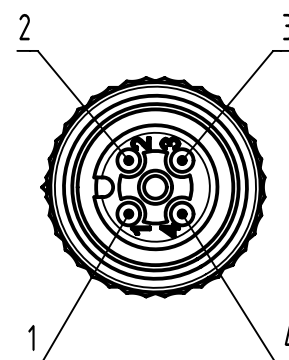

1 — brown — 1
2 — white — 2
3 — blue — 3
4 — black — 4

4.0 to 100	±1%
0.1 to 3.9	+0.04
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	.	.
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
0.1	XXX=001	
Step	a [m]	XXX

PUR black, 4x0.34mm ²	21348685491XXX
Type of cable	Part no.

- Protection level: IP67
- Temperature range: -25°C ... +80°C

		All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
		All rights reserved		Created by COSTEA		Inspected by 402676 Gross		Standardisation MUNTEANV Muntean	
Department HCS - RO						Date 2020-07-28		State Final Release	
HARTING Customised Solutions D-32339 Espelkamp		Title M12 A-cod 4-pol an/st m/f PUR						Doc-Key / ECM-Nr. 100900643/UGD/009/A 500000177071	
		Type TB		Number 21348685491XXX				Rev. A Page 1/1	