


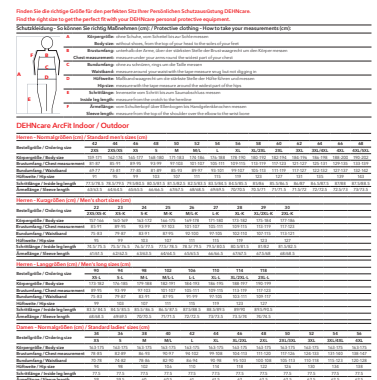

Typ	APT OD YE F 46
Art.-Nr.	787 786
Norm	IEC 61482-2, EN ISO 11612, EN 1149-5, EN ISO 20471, EN 13034, EN ISO 13688, EN ISO 11611
Störlichtbogenschutzklasse (Box-Test 7 kA / 0,5 s – einpolig)	APC 2
Lichtbogenenergie (W _{arc} eller W _{LBp})	320 kJ
Material	Modacryl (40%), Viskose (59%), Antistatika (1%), PU Membrane: Meta-Aramid Knitting (100%)
Arc Rating – ATPV (Open Arc)	16 cal / cm² *)
Arc Rating – ELIM (Open Arc)	13 cal / cm²
PPE Category (NFPA 70E)	PPE 2
Flächengewicht	300 g/m²
Material Nähfaden	Kevlar (100%)
Hauptfarbe	fluoreszierend gelb
Zweitfarbe	grau
Reißverschluss	rot
Größe (International)	46 (XL/2XL)
Stammdaten	
Nettogewicht	930.000 g/st
Zolltarifnummer (Komb. Nomenklatur EU)	62034911
GTIN (EAN)	4013364491410
VPE	1 ST

*) Oberstoff nach Vorbehandlung